


Marking: Video Products Inc UTP CAT. 5E 350MHZ PATCH ISO/IEC 11801 & EN 50288 & TIA/EIA-568-B.2 3P VERIFIED FOR GIGABIT ETHERNET  
24AWGX4P TYPE CM (UL) C(UL) CMH E164469-F3 www.vpi.us

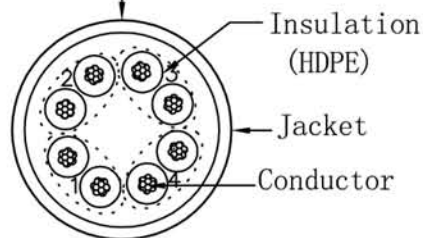


orange 1 white/orange	green 2 white/green
blue 3 white/blue	brown 4 white/brown

PA/R	PINOUT		
	P1 (T568B)	WIRE	P2 (T568B)
1	1	WHT/ORG	1
	2	ORG	2
2	3	WHT/GRN	3
	6	GRN	6
3	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

Conductor	Bare Copper 24AWG 7/0.196±0.015mm
Insulation	Thickness:MIN at any point:0.15mm MAX AVG:0.25mm Diameter:0.98±0.06mm
Jacket	PVC Thickness:MIN at any point:0.42mm MAX AVG:0.48mm Diameter:5.4±0.2mm

WIRE	CAT. 5E UTP STR 24AWG*4P
PLUG	YU-19 8p8c 50u"
Length	XX
WIRE COLOR	STANDARD

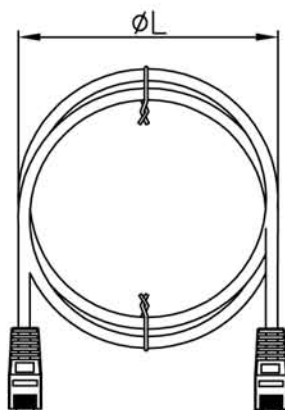

Packaging: 1PCS put in a PE bag



1275 Danner Drive Aurora, Ohio 44202  
Tel: 1-800-626-7801 Fax: 330-562-1999  
www.vpi.us sales@vpi.us