



Marking: Video Products Inc CAT.6 UTP ISO/IEC 11801 & EN 50288 & TIA/EIA-568-B.2-1 ETL/3P VERIFIED - 24AWGX4P PATCH TYPE CM (UL) C(UL) CMH E164469-F3 www.vpi.us

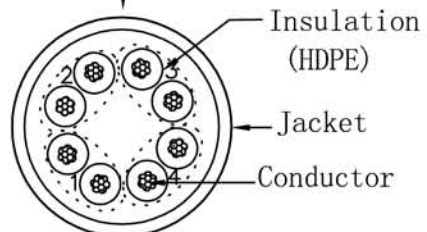

Conductor	Bare Copper 24AWG 7/0.196±0.015mm
Insulation	Thickness:MIN at any point:0.15mm MAX AVG:0.25mm Diameter:1.04±0.06mm
Jacket	PVC Thickness:MIN at any point:0.48mm MAX AVG:0.58mm Diameter:5.9±0.15mm

WIRE	CAT.6 UTP STR 24AWG*4P
PLUG	YU-19 8p8c 50U"
Length	XX
WIRE COLOR	STANDARD

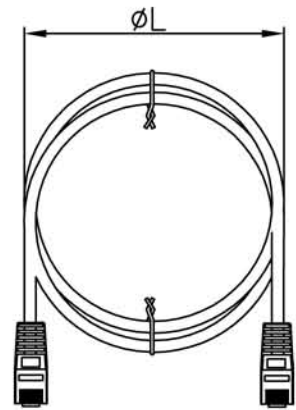

Packaging: 1PCS put in a PE bag

PA/R	PINOUT		
	P1 (T568B)	WIRE	P2 (T568B)
1	1	WHT/ORG	1
	2	ORG	2
2	3	WHT/GRN	3
	6	GRN	6
3	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8



1275 Danner Drive Aurora, Ohio 44202
 Tel: 1-800-626-7801 Fax: 330-562-1999
 www.vpi.us sales@vpi.us