



SE-HD4K10GB-5LC

5x1 HDMI Switch, Support 3D, 4Kx2K, CEC

Operating Instructions



FEATURES

- Select one of 5 different HDMI Signal input sources and switch to 1 HDMI display.
- Manual or with remote controller to select input signals.
- Supports 30/36bit deep color display.
- Support High Definition Audio : Dolby TrueHD, DTS-HD Master Audio
- Auto signal enhancement feature can improve signal quality after long distance transmission.
- Supports resolution up to 4Kx2K@30HZ
- Supports 3D
- Support CEC

TABLE OF CONTENTS

Specifications

Package Contents

Panel Descriptions

Connecting and Operating

Maintenance

Product service

Warranty

SPECIFICATIONS


Operating Temperature Range	-5 to +35°C(+23 to +95°F)
Operating Humidity Range	5 to 90%RH (No Condensation)
Input Video Signal	0.5-1.0 Volts P-P
Input DDC Signal	5 volts p-p(TTL)
Support Video format	DTV/HDTV: 4Kx2K@30HZ (1080i/720P/576P/576i/480P/480i) ; 1080p 3D Video @24HZ
Support Video Color Format	xv-YCC/deep color 36bit
Support Audio Format	DTS-HD Master Audio、Dolby true-HD etc.
Data transfer speed rate	10.2 Gbps (Maximum)
CEC	Support CEC
Power consumption	1.5 watts (Maximum)
Transmission Distance	Support maximum distance from source to sink up to 16meters at 1080P@60HZ, or 13meters at 4Kx2K@30HZ via standard HDMI cable/26AWG
Dimension (L×W×H)	115x62x25mm
Net Weight	212g

Note: Specifications are subject to change without notice. Mass and dimensions are approximate.

PACKING CONTENTS

- 1) Mini 5*1 HDMI switcher
- 2) 5VDC 1A Power Supply
- 3) Operating Instructions
- 4) Remote Controller

PANEL DESCRIPTIONS

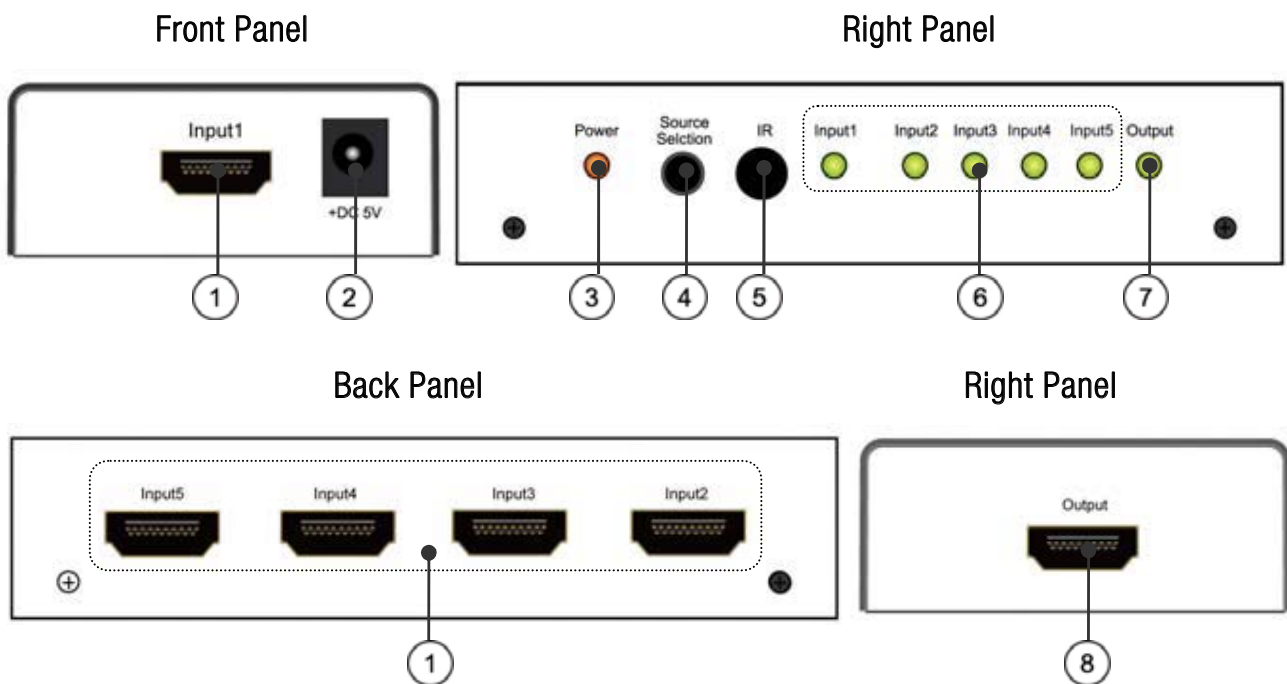


- | | | |
|------------------------------|---------------------|-----------------------------|
| 1) HDMI input ports | 2) Power input | 3) Indicator of Power input |
| 4) Input Select Button | 5) IR Receiver | 6) Indicator of HDMI Input |
| 7) Indicator of HDMI output. | 8) HDMI output port | |

Connecting and Operating

- 1) Connect the HDMI signal sources (Such as PS3, STB etc) to HDMI Input port of the Switch.
- 2) Connect the HDMI display device (such as: HD-LCD, HD-DLP) to HDMI Output port of the Switch.
- 3) Connect the Power adapter to Power input port
- 4) Power on.

Attention: Insert/Extract cable gently

Connection Diagram

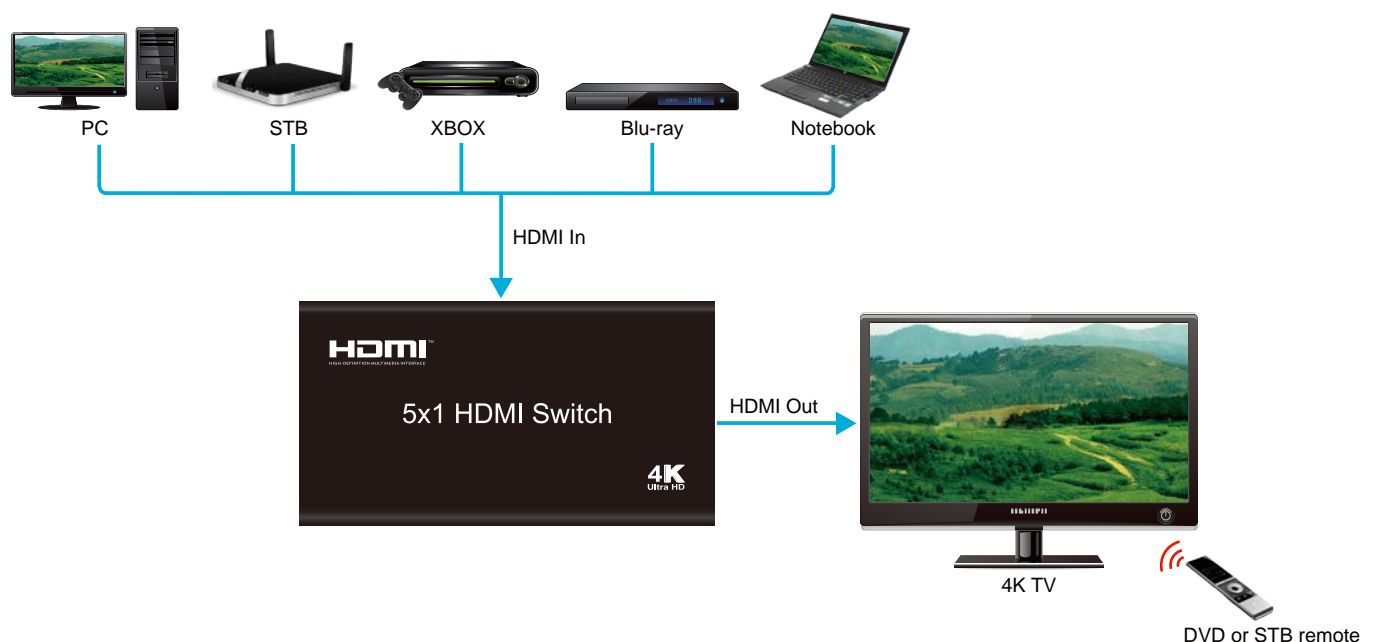

MAINTENANCE

Clean this unit with a soft, dry cloth. Never use alcohol, paint thinner or benzene to clean this unit.

PRODUCT SERVICE

1) **Damage requiring service:** The unit should be serviced by qualified service personnel if:

(a) The DC power supply cord or AC adaptor has been damaged;

(b) Objects or liquids have gotten into the unit;

(c) The unit has been exposed to rain;

(d) The unit does not operate normally or exhibits a marked change in performance;

(e) The unit has been dropped or the cabinet damaged.

2) **Servicing Personnel:** Do not attempt to service the unit beyond that described in these operating instructions. Refer all other servicing to authorized servicing personnel.

WARRANTY

The warranty period on this product (parts and labor) is one (1) year from the date of purchase. Please contact Video Products Inc at (800) 626-7801 or (330) 562-2622 or visit our website at <http://www.vpi.us> for information regarding repairs and/or returns. A return authorization number is required for all repairs/returns.