



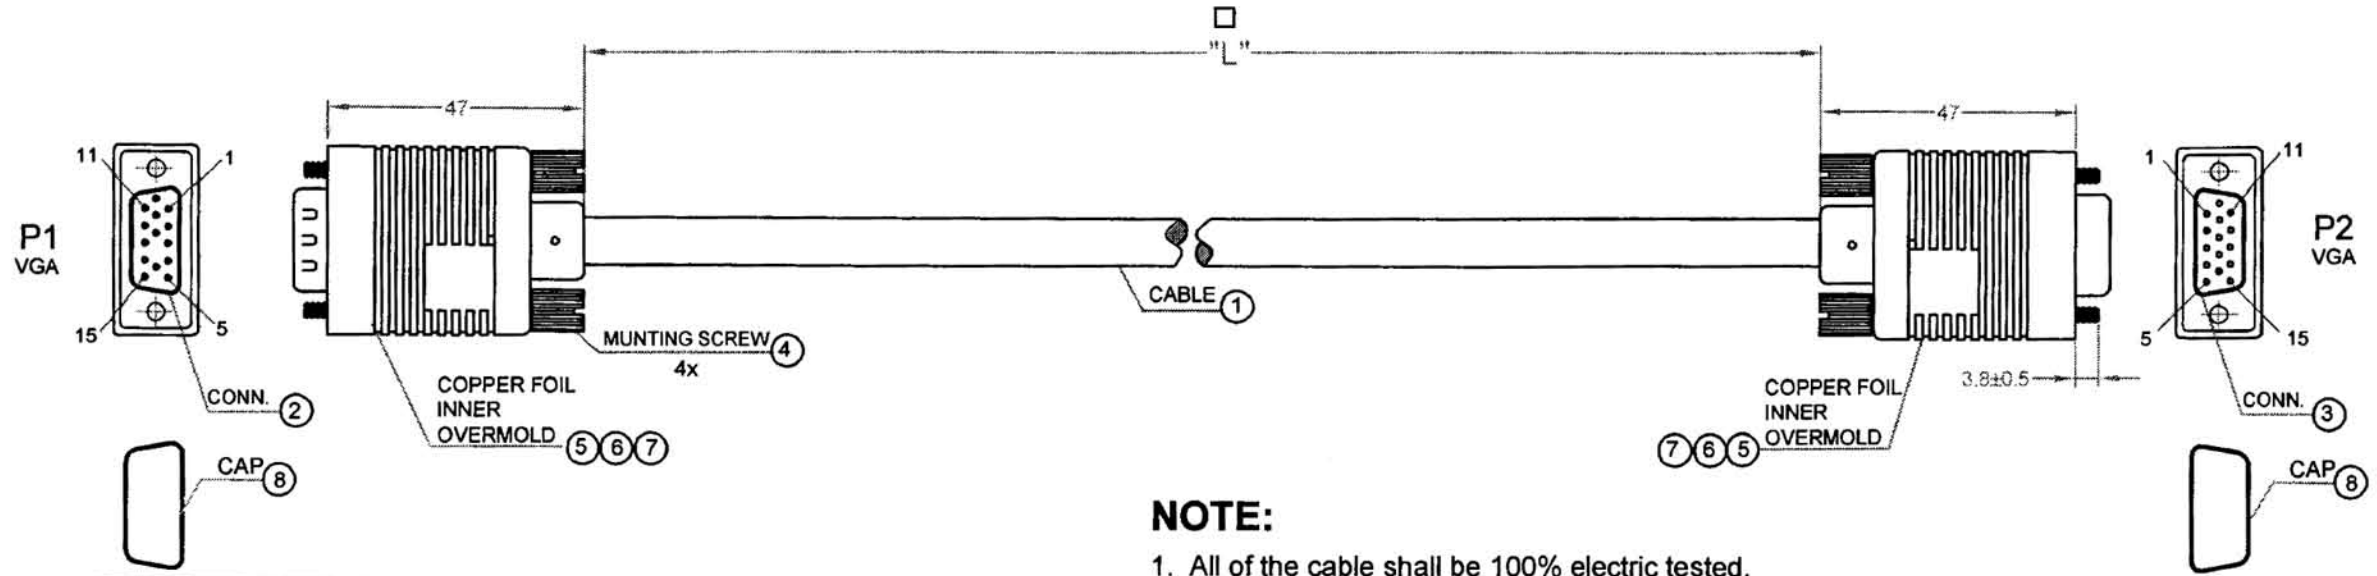

Pin Assignment:

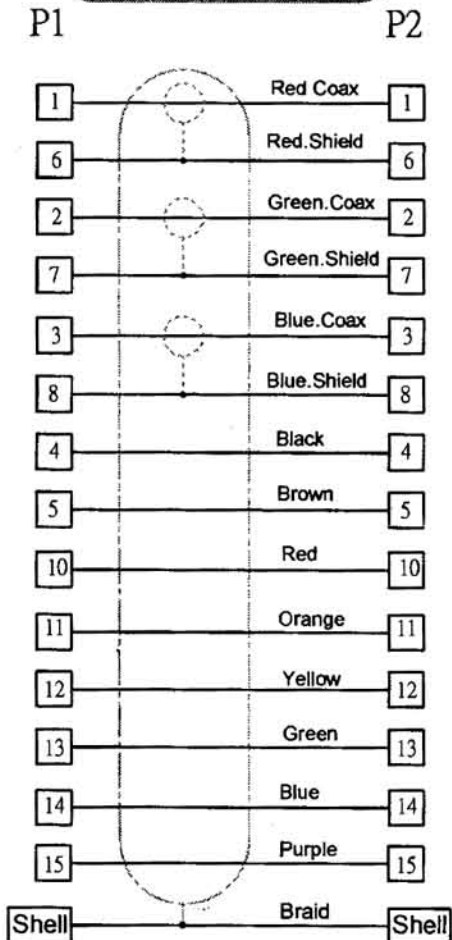

"L"
25FT(7620mm±50mm)
50FT(15240mm±100mm)
75FT(22860mm±200mm)
100FT(30480mm±200mm)

NOTE:

- All of the cable shall be 100% electric tested.
- Test Condition:
 - (1) Conductance Resistance: 10Ω/Max.
 - (2) Insulation Resistance: 5MΩ(Min)/300V DC/10ms.
- Any open miswiring & short and intermittent are not permitted.

⑧	CAP	2PCS	TPE CAP
⑦	CORPER FOIL	2PCS	Copper Foil 360° Soldered
⑥	INNER MOLDED		PE Molded Color: Natural.
⑤	OVERMOLD		CMP PVC .45P . Color: Black
④	MOUNTING SCREW	4PCS	#4-40UNC, 4*48, Nickel Plated.KNOB: Overmold CMP PVC,Color:Black.
③	FEMALE CONN.	1PCS	HDB 15Pin FEMale Solder Type Conn. Insulation: Black. Shell Nickel Plated. Contact:Gold Flash
②	MALE CONN.	1PCS	HDB 15Pin Male Solder Type Conn Viod 9Pin. Insulation: Black. Shell Nickel Plated. Contact:Gold Flash
①	CABLE	1PC	28AWG(7/ 0.127T)*3Coax+28AWG(7/ 0.127T)*8C+7/0.20TG+BRAID 85% Jacket Color: Black CMP PVC OD:7.4±0.2mm
NO.	ITEM	QTY	DESCRIPTION

VPI VIDEO PRODUCTS INCORPORATED

1275 Danner Drive Aurora, Ohio 44202
Tel: 1-800-626-7801 Fax: 330-562-1999
www.vpi.us sales@vpi.us