

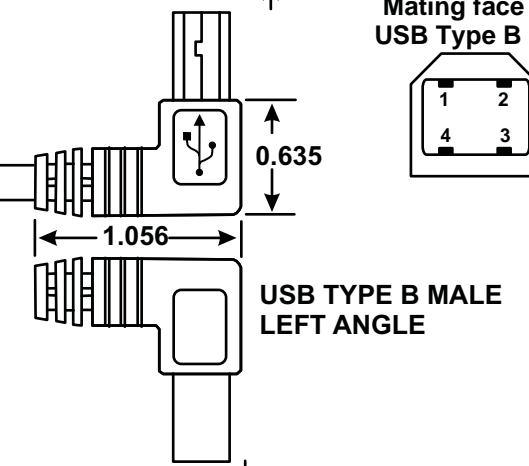
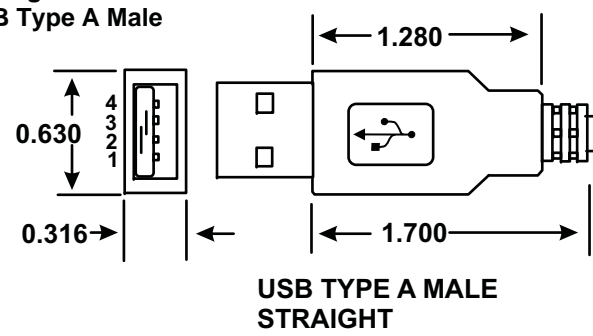



**VPI P/N: USB2-AB-SLA-xM-K**  
(x= 1, 2, 3 or 5 Meters long)

Length: Meters	Tolerance: +/- mm
1	60
2	60
3	60
5	100



UNITS: Inches



COMPLIES WITH USB 2.0 SPECIFICATION
OVERALL ALUMINUM-MYLAR BRAIDED SHIELDING
THE DRAIN WIRE MUST BE CONNECTED TO THE METAL SHELL AT EACH END
BLACK FULLY MOLDED CONNECTORS
USB B MALE LEFT ANGLE WITH NICKLE PLATED SHELL;CONTACTS GOLD PLATED "30U"
USB A MALE STRAIGHT WITH NICKLE PLATED SHELL;CONTACTS GOLD PLATED "30U"
UL2725 28AWG(19/0.08TC)*1TP+24AWG(7/0.20TC)*2C+AL-MYLAR+BRAID+DRAIN, PVC JACKET, OD: 4.2mm, BLACK

