


VPI P/N USB2-AB-DRA-xM-K

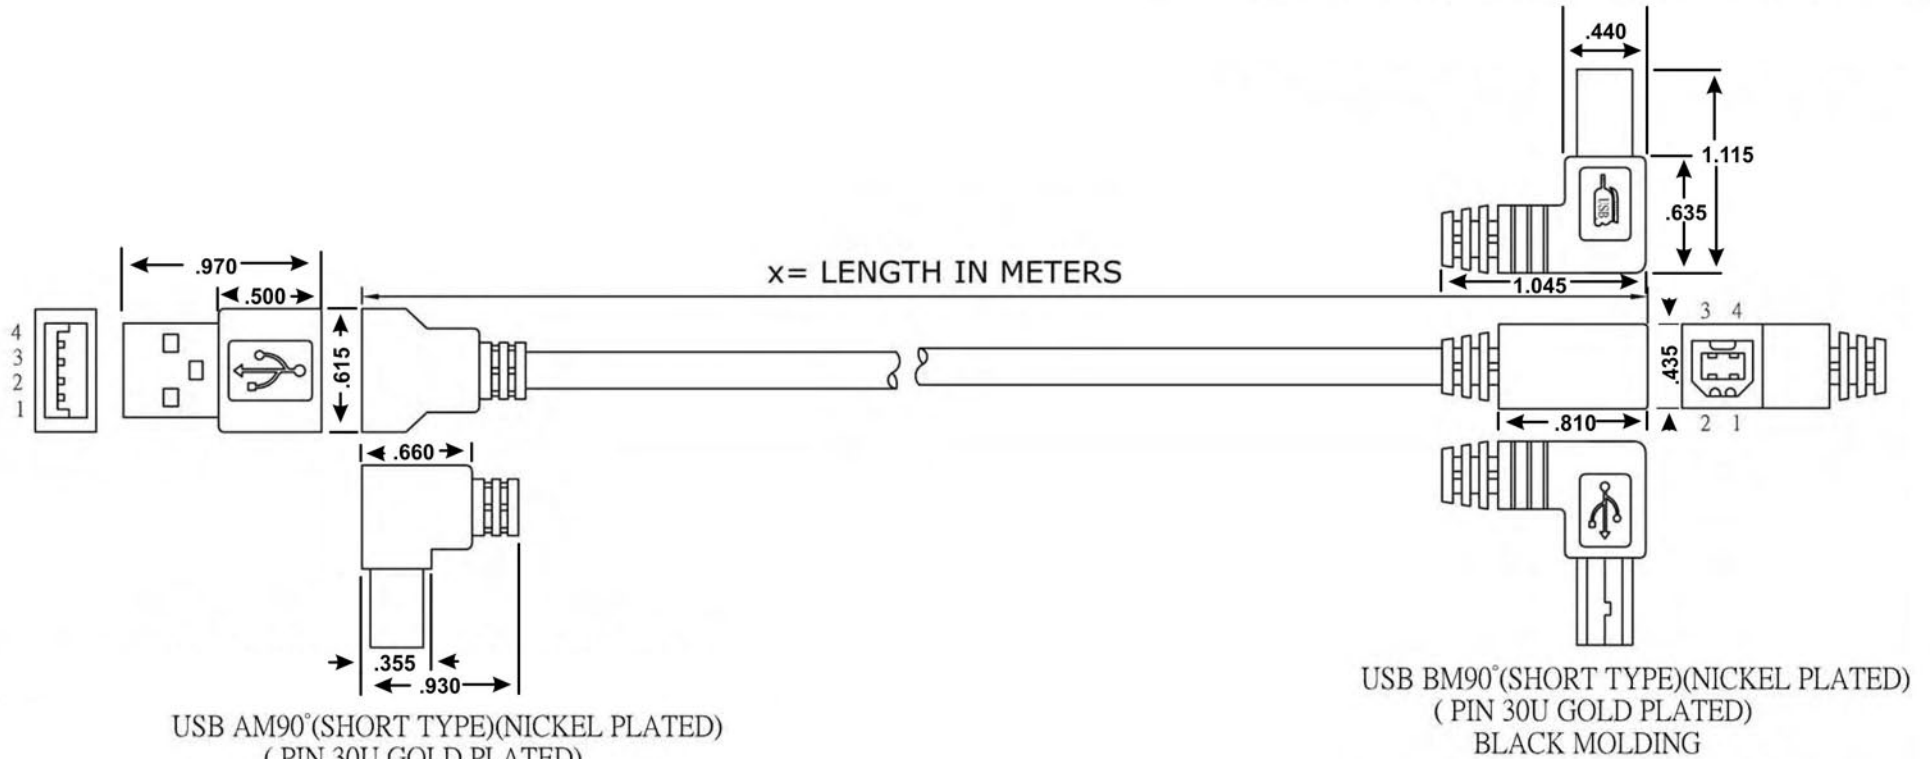

NOTE:

1. CABLE:UL2725 2.0REV,AL+B,28#*1P+24#*2C,OD=4.2mm,BLACK PVC JACKET.(AM)
2. LENGTH:L.
3. CONNECTOR:USB AM*1PCS(WHITE INSULATOR),USB BM*1PCS(WHITE INSULATOR)(PIN 30U GOLD PLATED)
4. MOLD:BLACK MOLDING
5. CONTACTS:

| | | | | | |
|--------|-----|-------|-------|-------|-------|
| USB AM | 1 | 2 | 3 | 4 | 64 |
| USB BM | 1 | 2 | 3 | 4 | 64 |
| | RED | WHITE | GREEN | BLACK | BRAID |
| | | #28 | #28 | | |
| | | PAIR | | | |

WHITE/GREEN PAIR...28AWG ,
RED/BLACK...24AWG

6. OPEN/SHORT TEST: 100% TEST.

INSULATION:5M.

7. RoHS Compliant

Units: Inches



1275 Danner Drive Aurora, Ohio 44202
Tel: 330-562-2622 Fax: 330-562-1999
www.vpi.us