




3 ft ± .6"
10 ft ± 1.2"
15 ft ± 1.2"

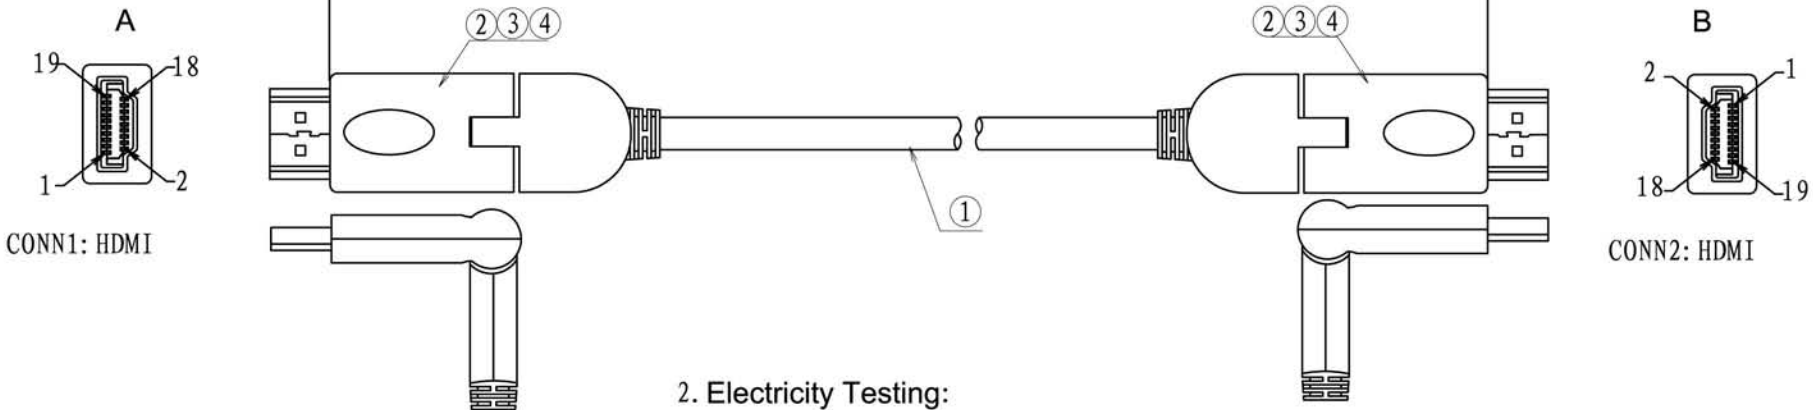

1. Pin Diagram:

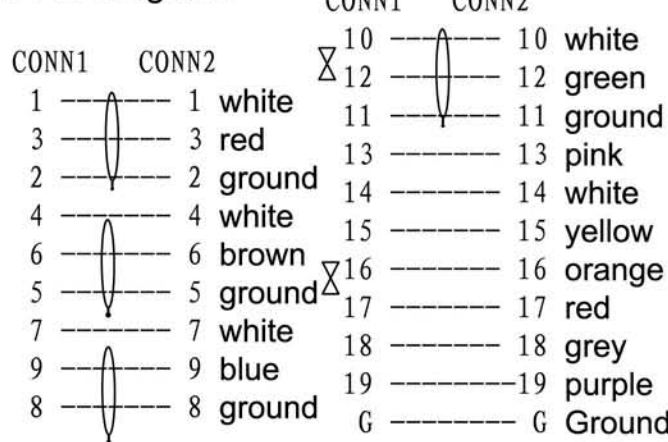

2. Electricity Testing:
 A. Voltage: DC 300V/10ms
 B. Insulation Resistance: ≥ 10MΩ
 C. Conduct Resistance: ≤ 3Ω



VPI VIDEO PRODUCTS INCORPORATED

1275 Danner Drive Aurora, Ohio 44202
 Tel: 1-800-626-7801 Fax: 330-562-1999
 www.vpi.us sales@vpi.us

NO.	PART NO.	DESCRIPTION	Q' TY	UNIT
1	cable	UL20276 [1P*28# (7/0. 127TA)+AE (7/0. 127TA)+MYALR] *4C+28# (7/0. 127TA) *1P+28# (7/0. 127TA) *5C+AE (7/0. 127TA)+B (50% Al Braid) Mark: HDMI Black (RoHS)	1	PC
2	conn	HDMI (M) Golden Plated (RoHS)	2	PCS
3	case	HDMI assembly case (ROHS)	2	SETS
4	Outer Molding	45P Black PVC (RoHS)	6.5	g