


### Technical Specification for the VEXT-UAS-xx-MM VIDEO CABLE WITH RIGHT-ANGLE-UP ON ONE END


#### HD15 Male

#### HD15 Male

- CABLE INCLUDES**
- 3- 75 OHM MINI COAX 30 AWG CENTER CONDUCTOR
  - 2- 28 AWG STRANDED TWISTED PAIR
  - 5- 28 AWG STRANDED CONDUCTORS
  - OVERALL METALIZED MYLAR FOIL AND TINNED COPPER BRAIDED SHIELD AND 28 AWG DRAIN WIRE
  - LIGHT GRAY CABLE JACKET
  - FULLY MOLDED DARK BLUE HD15 MALE CONNECTORS
  - ALL MATERIALS AND CONSTRUCTION MUST BE UL RECOGNIZED AND RoHS COMPLIANT

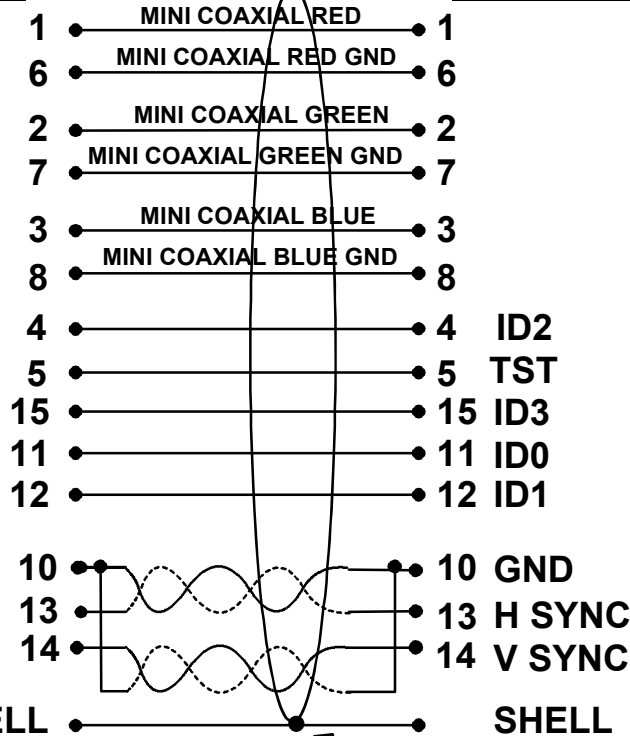

#### Mating Face of HD15 Male

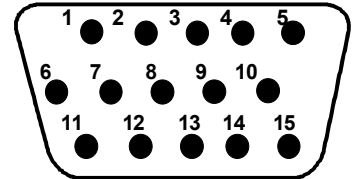

PIN 9 IS NOT USED IN HD15 CONNECTORS

ALL CONDUCTORS ARE 28 AWG STRANDED

THE DRAIN WIRE OF THE OVERALL SHIELD IS CONNECTED TO THE METAL SHELL AT EACH END OF THE CABLE

SHELL



SHELL

"www.vpi.us" PRINTED ON CABLE IN ADDITION TO UL REQUIRED MARKINGS

METALIZED MYLAR FOIL SHIELD WITH DRAIN WIRE AND OVERALL TINNED COPPER BRAIDED SHIELD

#### Top View HD15-Right Angle UP-Male (Dk Blue-PMS293)

#### HD15-Straight-Male (Dk Blue-PMS293)

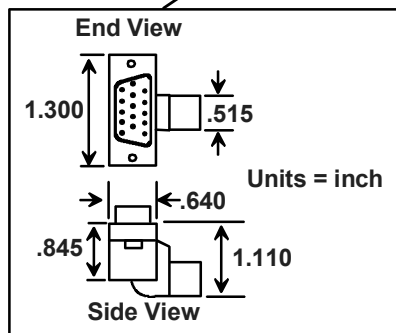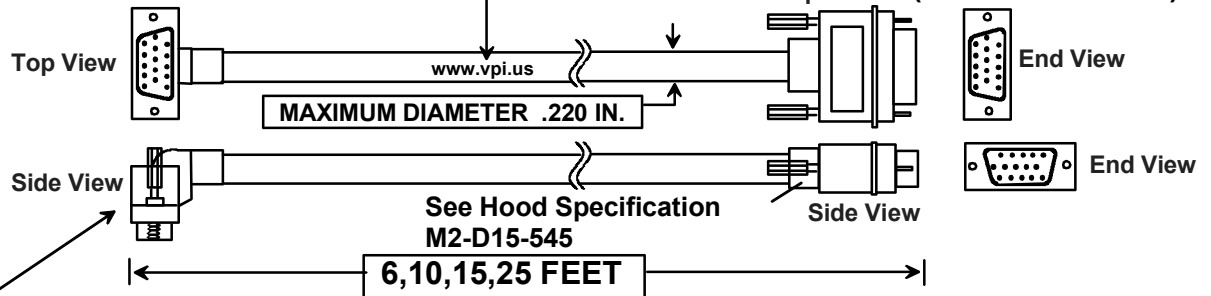

**VIDEO PRODUCTS INCORPORATED**

1275 Danner Drive Aurora, Ohio 44202

Tel: 1-800-626-7801 Fax: 330-562-1999

www.vpi.us

sales@vpi.us