



Wt Customer Spec

VPI P/N: CAT5E-RA-xx-color

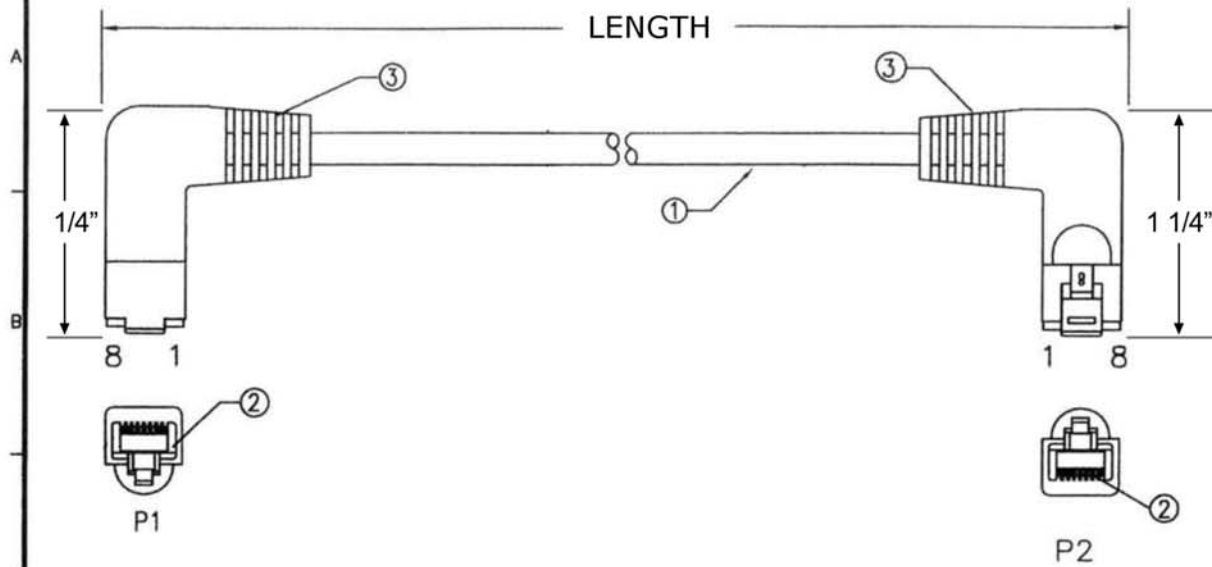

Length-Ft (mm)	Tolerance-+/-In. (mm)
2 (610)	1.18 (30)
3 (914)	1.57 (40)
4 (1220)	1.57 (40)
5 (1524)	2.36 (60)
6 (1829)	2.36 (60)
7 (2133)	2.36 (60)
8 (2440)	2.36 (60)
9 (2743)	2.36 (60)
10 (3048)	2.36 (60)
11 (3353)	3.14 (80)
12 (3658)	3.14 (80)
13 (3962)	3.14 (80)
14 (4267)	3.14 (80)
15 (4572)	3.14 (80)

No.	Component	Description
1	CABLE	CAT5E 4P*24 AWG(7/0.196BC),PVC JACKET, O.D.=5.5mm, 75°C, color as ordered
2	CONN.	RJ45 8P8C PLUG, CONTACT:GOLD PLATED 15μ"
3	BOOT	PVC, SNAGLESS, color as ordered
4	CONSTRUCT.	CABLE WITH NO OVERALL SHIELD AND 4 UNSHIELDED STRANDED TWISTED PAIR; ALL MATERIALS RoHS COMPLIANT
5	MARKINGS ON JACKET	(UL) TYPE CM 75°C 24AWG 4PR <UL FILE #> CSA <FILE#> CMG 75°C 24AWG 4PR FT4 ETL VERIFIED CAT5e UTP TIA/EIA 568B.2

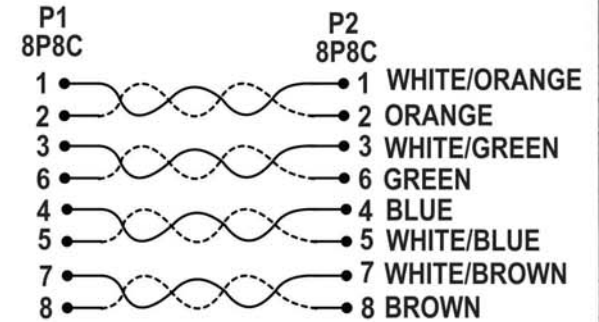

VIDEO PRODUCTS INCORPORATED
 1275 Danner Drive Aurora, Ohio 44202
 Tel: 330-562-2622 Fax: 330-562-1999
 www.vpi.us