


Wd Customer Spec

VPI P/N: CAT5E-USF-xx-BLACK


(xx= Length-see chart)

Gold flash plated on contact area

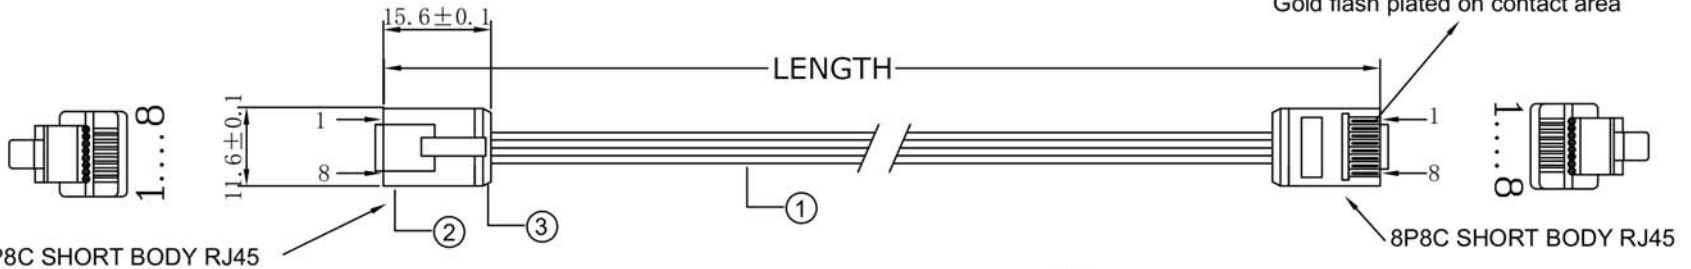


UNITS: Millimeters

PINOUT: (TIA/EIA 568B Standard)

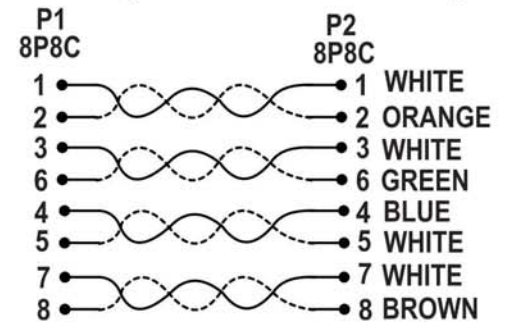

Length-Ft (mm)	Tolerance: +/-In. (mm)
1 (305)	+30 / -10
2 (610)	+40 / -20
3 (915)	+40 / -30
5 (1530)	+50 / -30
7 (2150)	+60 / -40
10 (3050)	+70 / -50
14 (4270)	+100 / -60
25 (7630)	+200 / -100
50 (15250)	+300 / -200
Length-In. (mm)	Tolerance: +/-In. (mm)
6 (155)	+20 / -10
18 (450)	+30 / -10

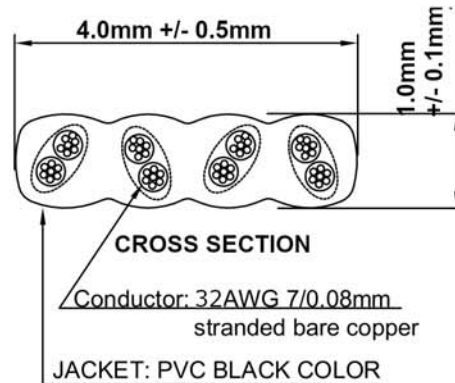

No.	Component	Description
1	CABLE	CAT5E 4P*32 AWG(7/0.08BC),PVC JACKET, O.D.=1.0*4.0mm, BLACK
2	CONN.	RJ45 8P8C PLUG, UNSHIELDED, CONTACT: GOLD PLATED Fμ"
3	MATERIAL	PE RUBBER INSERT, TRANSPARENT
4	CONSTRUCT.	CABLE WITH NO OVERALL SHIELD AND 4 UNSHIELDED STRANDED TWISTED PAIR ALL MATERIALS ARE RoHS COMPLIANT
5	MARKING ON JACKET	NONE

**VPI** VIDEO PRODUCTS INCORPORATED  
 1275 Danner Drive Aurora, Ohio 44202  
 Tel: 330-562-2622 Fax: 330-562-1999  
 www.vpi.us