

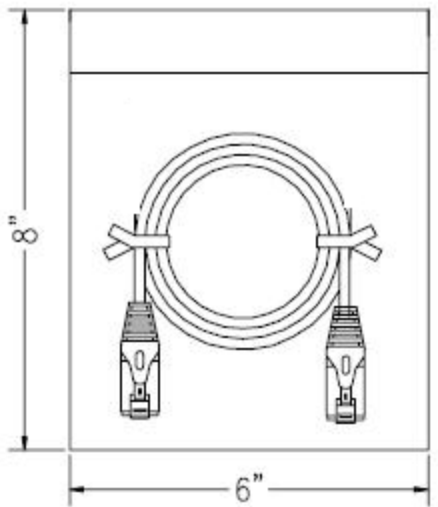


**VPI P/N: CAT6-FLT-xx-SHLD**  
 (xx= 1/2/3/5/7/10/14/25/50 feet)

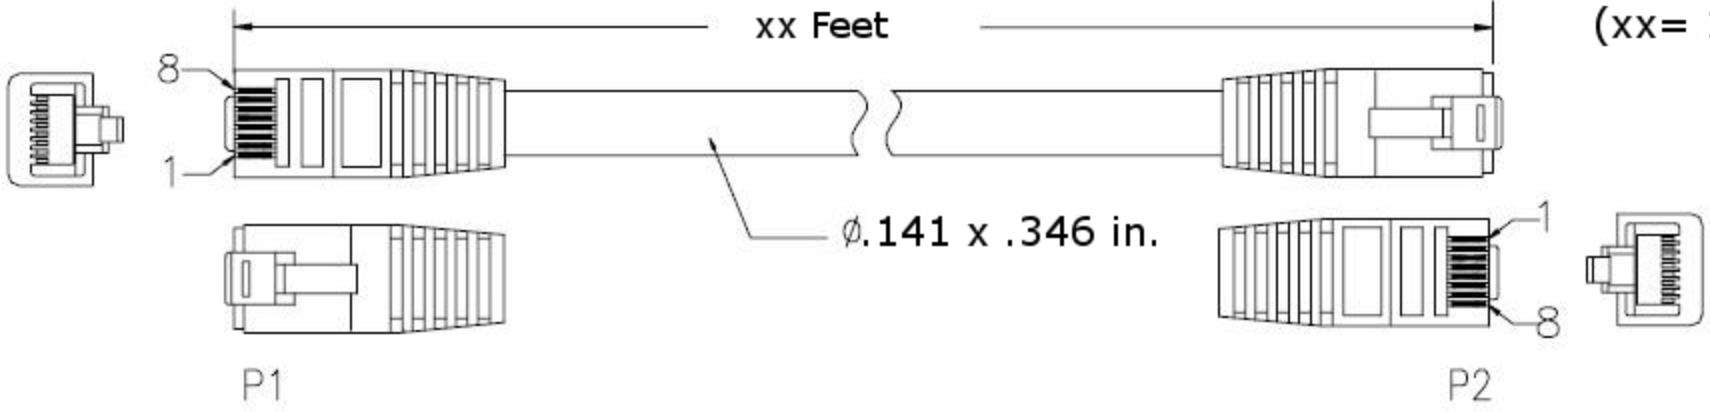

PINOUT DIAGRAM:

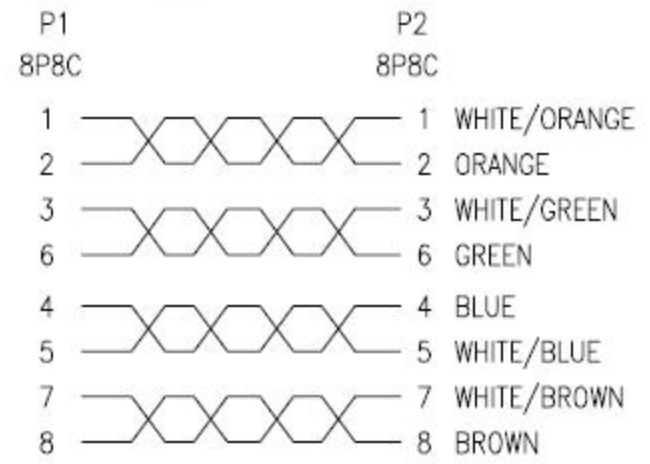

- NOTES:
- 1) SHORT AND OPEN 100% TESTING.  
 CONDKUCTOR RESISTANCE 5 Ω  
 INSULATION RESISTANCE 20MΩ  
 HI-POT:DC250V
  - 2) RoHS Compliant

3	OUTER JACKET PVC 60PA WHITE(1901)
2	RJ45 8P8C PLUG SHORT BODY 3U"
1	CAT.6 STP FLAT CABLE 28#4P STRANDED OD:3.6*8.8MM WHITE(1901)



**VIDEO PRODUCTS INCORPORATED**

1275 Danner Drive Aurora, Ohio 44202  
 Tel: 330-562-2622 Fax: 330-562-1999  
 www.vpi.us