
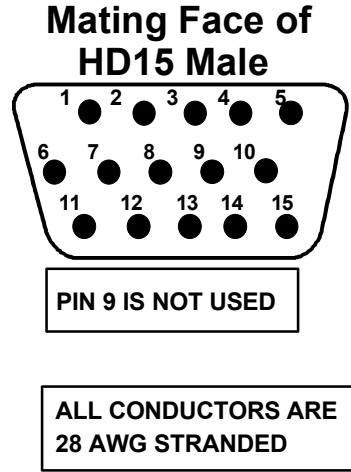


## Technical Specification for the VEXT-DAS-xx-MM VIDEO CABLE WITH RIGHT-ANGLE-DOWN ON ONE END

### HD15 Male

### HD15 Male

- CABLE INCLUDES**
- 3- 75 OHM MINI COAX 30 AWG CENTER CONDUCTOR
  - 2- 28 AWG STRANDED TWISTED PAIR
  - 5- 28 AWG STRANDED CONDUCTORS
  - OVERALL METALIZED MYLAR FOIL SHIELD AND TINNED COPPER BRAIDED SHIELD AND 28 AWG DRAIN WIRE
  - LIGHT GRAY CABLE JACKET
  - FULLY MOLDED BLUE (PMS293) HD15 MALE CONNECTORS
  - ALL MATERIALS AND CONSTRUCTION MUST BE UL RECOGNIZED AND RoHS COMPLIANT

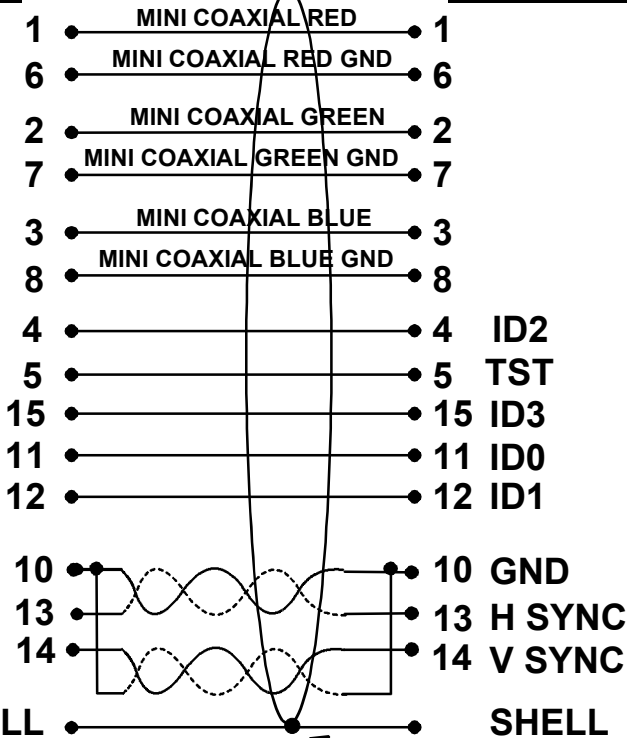

THE DRAIN WIRE OF THE OVERALL SHIELD IS CONNECTED TO THE METAL SHELL AT EACH END OF THE CABLE

"www.vpi.us" PRINTED ON CABLE IN ADDITION TO UL REQUIRED MARKINGS

METALIZED MYLAR FOIL SHIELD WITH DRAIN WIRE AND OVERALL TINNED COPPER BRAIDED SHIELD

### Top View HD15-Right Angle DOWN-Male (Dk Blue-PMS293)

### HD15-Straight-Male (Dk Blue-PMS293)

