


VPI P/N: BOX-SM5E-WL-2-SHLD

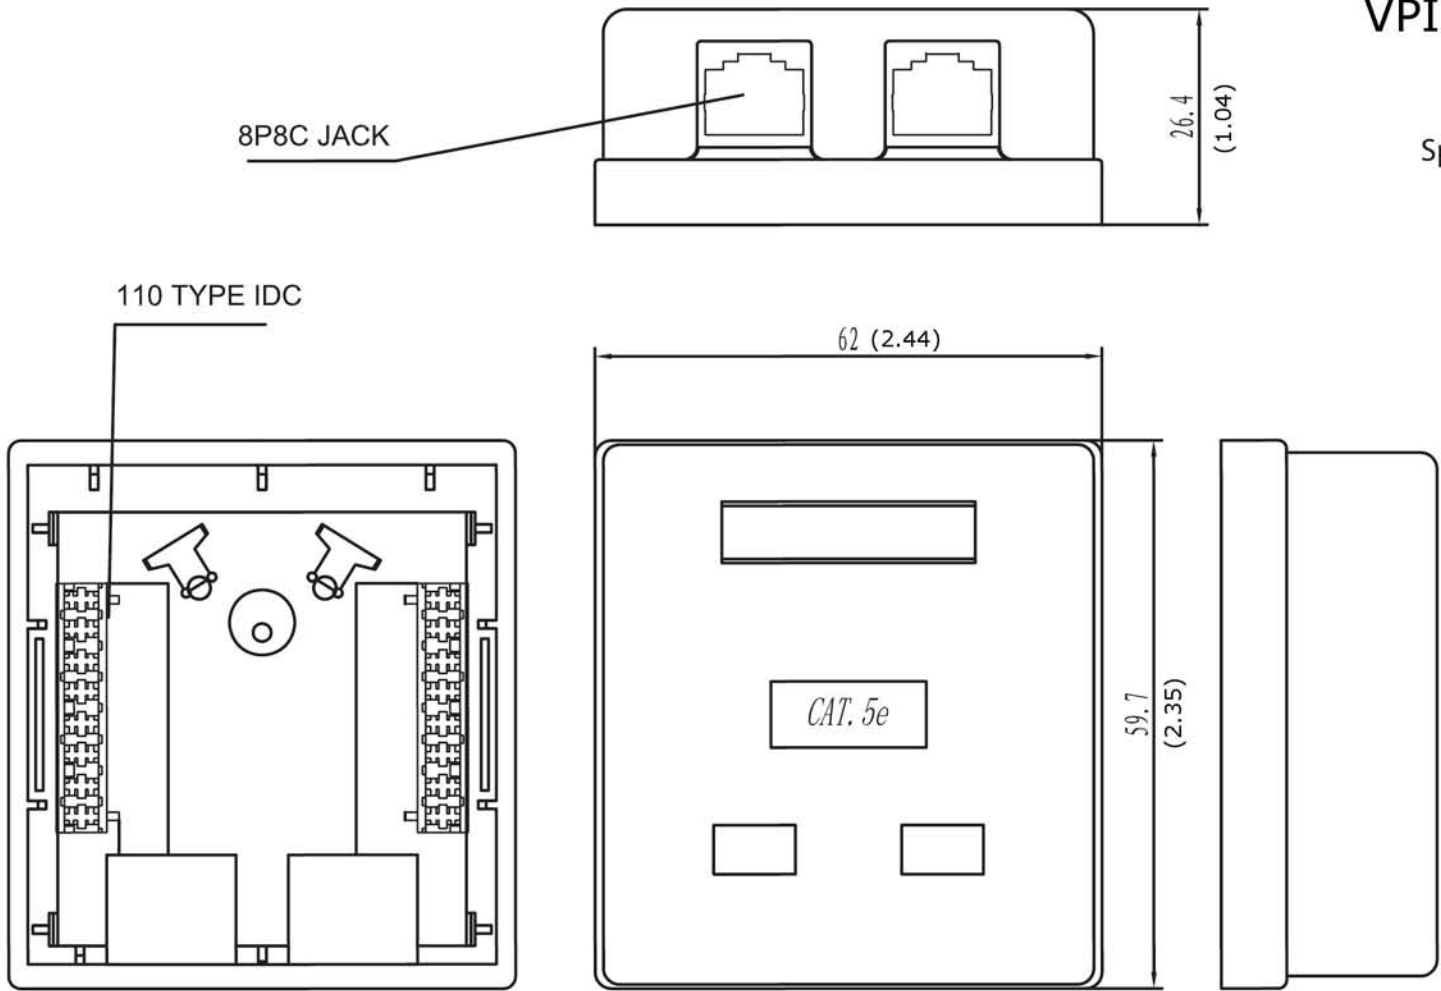

Specification:

- Material:**
- Plastic Housing: ABS White
 - RJ45 contact material & finish:
 - Phosphor bronze with nickel plating
 - Gold plated contacts
 - IDC Housing: PC
 - IDC terminal material & finish:
 - Phosphor bronze with tin plating
 - 110 punchdown tool compatible
 - Suitable for 22-26 AWG stranded or solid conductors

Performance:

- Designed for T568A & T568B wiring
- Insertion force: 1.98 lbf
- Retention Strength: 7.7 kgs
- Operating Temperature: -30°C to 68°C
- Durability:
 - Jack: 750 cycles plug to jack inserting and removing.
 - Insertion cycles: 20 per minute/max
 - Contact resistance test: 100 cycles
 - IDC Terminal: 200 punchdowns max
- Complies with ANSI/TIA/EIA 568 C.3 standard

UNIT: mm (Inch)



**VIDEO
PRODUCTS
INCORPORATED**

1275 Danner Drive Aurora, Ohio 44202
Tel: 330-562-2622 Fax: 330-562-1999
www.vpi.us