


Marking: YFC CAT.7 SSTP PATCH 3P VERIFIED TO ANSI/TIA-568-C.2 & ISO/IEC 11801 ED.2 & EN 50288-4-2 & (FP1215) IEC 60332-1-2 ▲ 26AWGX4P CMX (UL) c(UL) CMH

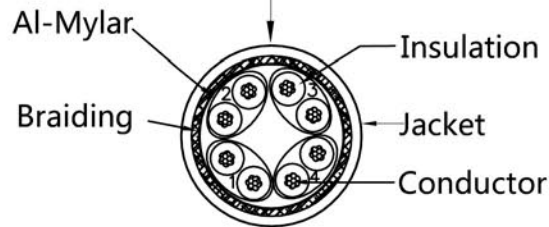

orange 2 white/orange	green 3 white/green
blue 1 white/blue	brown 4 white/brown

Length (Ft)	Tolerance (+/- inch)	Tolerance (%)	Length (Ft)	Tolerance (+/- inch)	Tolerance (%)
1	1.2	10.00%	15	3.15	1.75%
2	1.2	5.00%	25	4	1.33%
3	1.2	3.33%	50	6	1.00%
5	1.2	2.00%	100	6	0.50%
7	2	2.38%			
10	2	1.67%			

Conductor	Bare Copper 26AWG
Insulation	Thickness:MIN at any point:0.20mm MAX AVG:0.35mm Diameter:1.06±0.03mm
Jacket/PVC	Thickness:MIN at any point:0.50mm MAX AVG:0.60mm Diameter:5.7±0.2mm
Wire	CAT.7 SSTP 26AWG*4P
Plug	YUS-04 8P8C 50u"
Color	green/black/blue/red/white/grey/ yellow/purple/orange
PAPT NAME	SPECIFICATION DESCRIPTION

PA/R	PINOUT		
	P1(T568B)	WIRE	P2(T568B)
2	1	WHT/ORG	1
	2	ORG	2
3	3	WHT/GRN	3
	6	GRN	6
1	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8