




Item || Split Core Current Transformer

Model || ENVIROMUX-CT50-SC10

Dimension (Unit:mm)

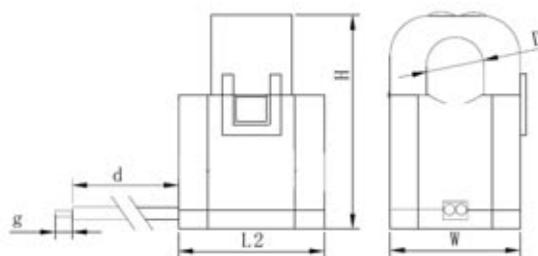

Outline Size				Window Size	Leads	
L1	L2	W	H	D	d	g
---	26	23	39	10	1000	6


#### Electrical Diagram



#### Parameters

Rated Current	50A
Output	333mV
Accuracy	1.0
Frequency	50/60HZ
Insulation Strength	3KV

#### Performance Curve

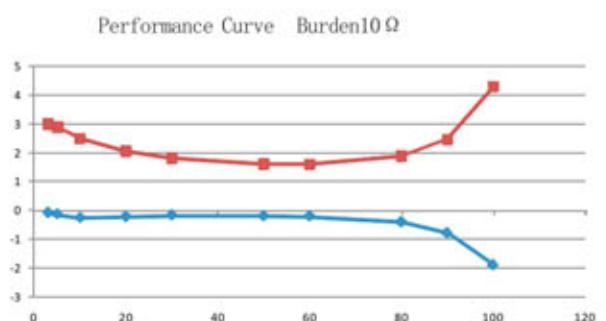

#### Specification

Leads: 1015# 24AWG  
 Operating Temperature: -20°C to +55°C  
 Storage Temperature: -40°C to +70°C  
 Features: Split core design, the split core design permits non-contact current measurements through magnetic field induction without requiring that the primary wire be taken offline and disconnected for CT installation. This method permits a safer, easy and portable current measurement.