



Wire Details

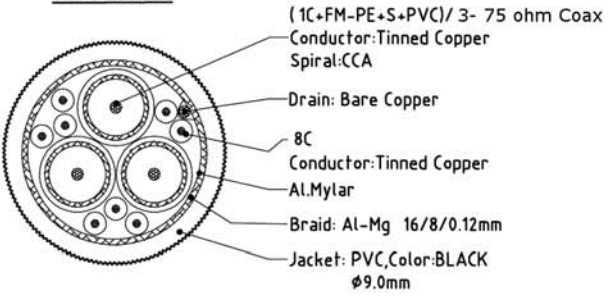

- Lengths:**
- xx= 6 Ft +/-1.97in. (1828mm +/- 50mm)
 - 10Ft +/-2.36in. (3048mm +/- 60mm)
 - 15Ft +/- 3.93in. (4572mm +/- 100mm)
 - 25Ft +/-6.30in. (7620mm +/- 160mm)
 - 50Ft +/-11.82in. (15240mm +/-300mm)
 - 75Ft +/- 18.11in. (22860mm +/-460mm)
 - 100Ft +/-23.62in. (30480mm +/-600mm)

PIN ASSIGNMENT:

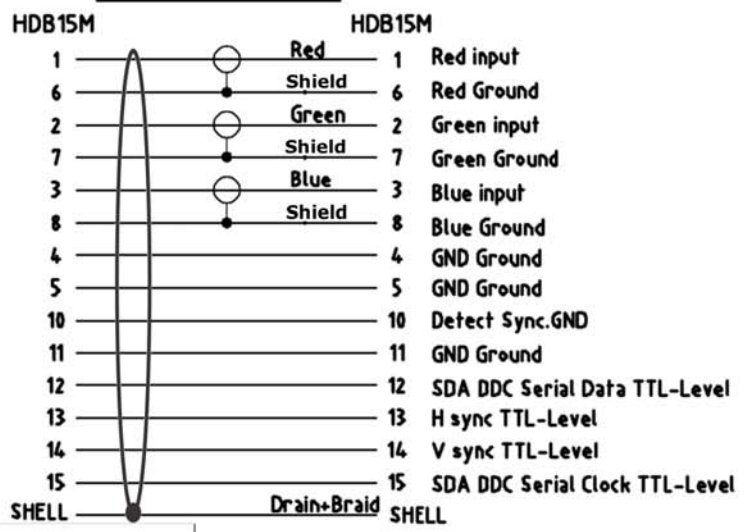

No.	Component	Description
1	CABLE	UL20276 {[28AWG+AL+S(7/0.12TC+FM-PE+30/0.12CCA+2.5PVC)]*3 75 OHM COAXIAL+ [28AWG(7/0.12TC)*8C]}, AL+D+128B AL-MG,O.D. 9.5mm, JACKET BLACK
2	CONNECTOR	HD15 MALE, BLUE INSULATOR, NICKEL PLATED
3	INNERMOLD	PE INTERNAL MOLD MATERIAL
4	OUTERMOLD	45P BLACK PVC
5	SCREW	MOLDED THUMBSCREW #4-40UNC, 2.3DIA. * 45mm LONG, BLACK
6	FERRITE	FERRITE CORE 17.5x10.5x28.5mm, MOLDED PVC BLACK
7	CONSTRUCT.	ALL MATERIALS ARE RoHS COMPLIANT, DRAIN WIRE IS CONNECTED TO METAL SHELL AT EACH END