

# Super Flat CAT5e/6/7 Bulk Cables

[www.vpi.us/c/bulk-cable-sf-198](http://www.vpi.us/c/bulk-cable-sf-198)

## CAT5e Super Flat Stranded Bulk Cable, Unshielded - 250 ft



**CAT5E-SF-BULK-BLACK06**  
**CAT5E-SF-BULK-WHITE**

- These flat CAT5e noodle cables are ideal for hiding under carpets.
- Supports full and half-duplex operation.
- Tested for electrical performance.
- Flame-retardant PVC jacket and polyolefin insulation.
- Meets or exceeds ANSI/TIA/EIA-568-B.2-1 and ISO/IEC 11801, Class D requirements
- Gauge: 28 AWG
- Thickness:
  - CAT5E-SF-BULK-BLACK06: 0.06 in.
  - CAT5E-SF-BULK-WHITE: 0.075 in.
- Bend Radius:
  - Up/Down: 12.5 mm
  - Left/Right: 0 mm
- Operating and storage temperature: 32 to 140°F (0 to 60°C).
- Length: 250 Feet
- Color: Black or White


## CAT5e Super Flat Stranded Bulk Cable, Shielded - 250 ft



**CAT5E-SF-BULK-BLACK-SHLD**

- These super flat CAT5e noodle cables are only 0.10" thick and are ideal for hiding under carpets.
- Supports full and half-duplex operation.
- Tested for electrical performance.
- Flame-retardant PVC jacket and polyolefin insulation.
- Meets or exceeds ANSI/TIA/EIA-568-B.2-1 and ISO/IEC 11801, Class E requirements
- Gauge: 28 AWG
- Thickness: 0.10"
- Bend radius:
  - Up/Down: 100 mm
  - Left/Right: 0 mm
- Color: Black only


## CAT5e Super Flat Stranded Bulk Cable, Unshielded - 250 ft

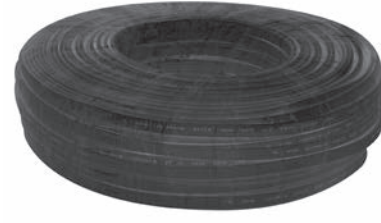

**CAT5E-SF-BULK-BLACK09**

- These flat CAT5e noodle cables are ideal for hiding under carpets.
- Supports full and half-duplex operation.
- Tested for electrical performance.
- Flame-retardant PVC jacket and polyolefin insulation.
- Meets or exceeds ANSI/TIA/EIA-568-B.2-1 and ISO/IEC 11801, Class D requirements
- Gauge: 28 AWG
- OD: 2.40x7.12mm(0.09x0.29 inches)
- Operating and storage temperature: 32 to 140°F (0 to 60°C).
- Length: 250 Feet
- Color: Black

## CAT5e Super Flat Stranded Bulk Cable, Unshielded - 250 ft




**CAT6-SF-BULK-BLACK**

- These super flat CAT6 noodle cables are only 0.06" thick and are ideal for hiding under carpets.
- Supports full and half-duplex operation.
- Tested for electrical performance.
- Flame-retardant PVC jacket and polyolefin insulation.
- Meets or exceeds ANSI/TIA/EIA-568-B.2-1 and ISO/IEC 11801, Class E requirements
- Gauge: 28 AWG
- Thickness: 0.06"
- Max length for data transfer: 65 feet (20 meters)
- Color: Black only

## CAT7 Super Flat Stranded Bulk Cable - 250 ft

---

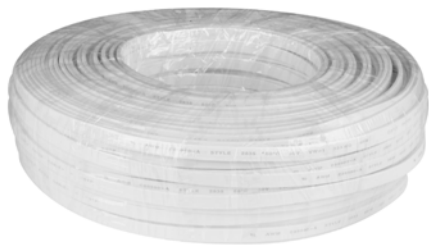

### **CAT7-SF-BULK-WHITE**

- These super flat CAT7 noodle cables are only 0.075" thick and are ideal for hiding under carpets.
- Supports 10/100/1000/10G Base-T networks
- Consists of four individually shielded pairs.
- Stranded copper conductors for flexibility - great for frequent changes that occur at the wall outlet or patch panel.
- Supports full and half-duplex operation.
- Tested for electrical performance.
- Flame-retardant PVC jacket and polyolefin insulation.
- Meets or exceeds ANSI/TIA/EIA-568-B.2-1 and ISO/IEC 11801, Class E requirements
- Gauge: 32 AWG
- Thickness: 0.075"
- Width: 0.25"
- Operating temperature: 32 to 140°F (0 to 60°C)
- Ideal for running across a room without seeing it by hiding under carpet