


VPI P/N: RJ11-PLG-6P4C

THIS CONNECTOR IS INTENDED FOR USE WITH VPI P/N: PHONE4-FLT-BULK-28SILVER

SPECIFICATION

- 1. ELECTRICAL
  - 1. INSULATION RESISTANCE: 100M OHM MIN
  - 2. DIELECTRIC STRENGTH: 1000AC(50-60Hz)1 MINUTE
  - 3. CONTACT RESISTANCE: 30m OHM MAX.
- 2. MECHANICAL
  - 1. CABLE TO PLUG TENSILE STRENGTH:5.4Kg MIN
  - 2. DURABILITY: 750 CYCLES MIN.

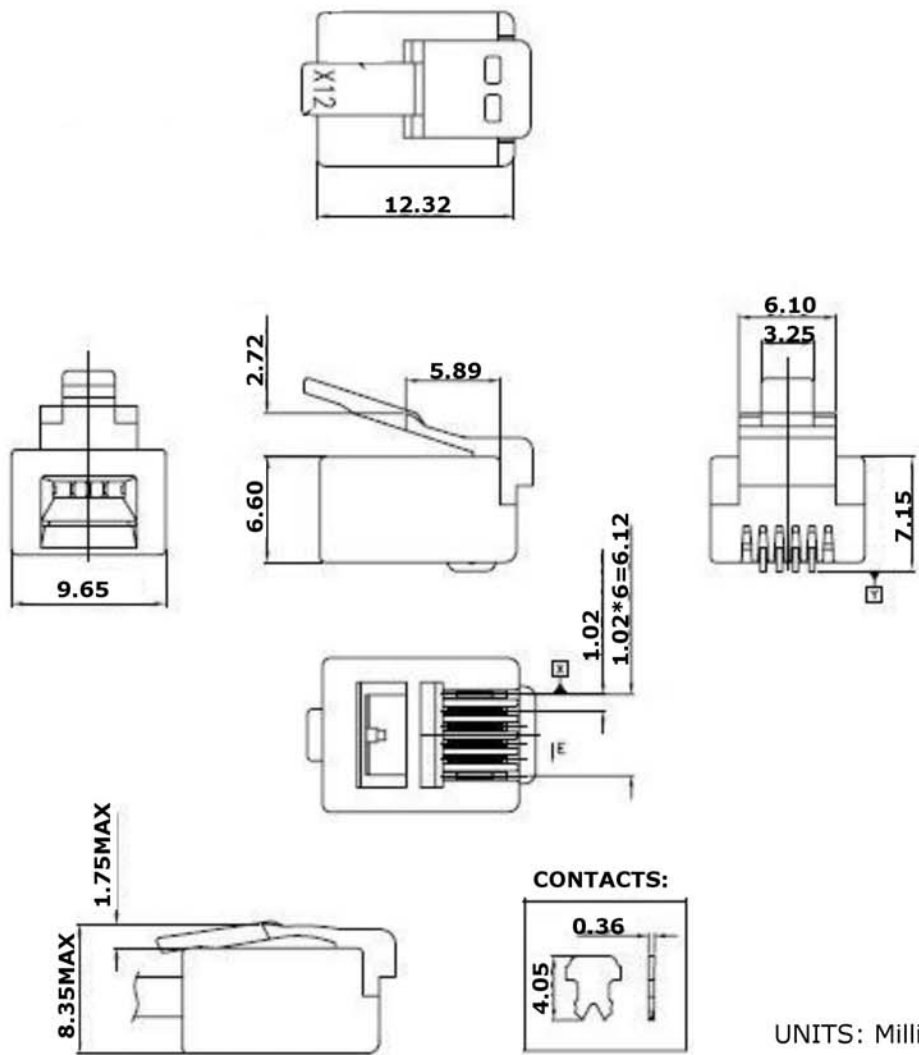

UNITS: Millimeters

No.	Component	Description
1	CONNECTOR	6P4C, CONTACT: GOLD PLATED-3μ
2	CABLE	COMPATIBLE WITH STRANDED FLAT WIRE (VPI P/N PHONE4-FLT-BULK-28SILVER)
3	PLUG TYPE	RJ11 UL 94-V2
4	CONSTRUCT.	FOUR CONTACTS, UNSHIELDED PLUG, RoHS COMPLIANT

**VPI** VIDEO PRODUCTS INCORPORATED  
 1275 Danner Drive Aurora, Ohio 44202  
 Tel: 330-562-2622 Fax: 330-562-1999  
 www.vpi.us