



VIDEO
PRODUCTS
INCORPORATED

1275 Danner Drive Aurora, Ohio 44202
Tel: 330-562-2622 Fax: 330-562-1999
www.vpi.us

USB3A-WTP-QR-1M-MM

Specifications:




- Contact Resistance: <math><30m\Omega</math>
- Dielectric Withstanding Voltage: 1000V/AC
- Insulation Resistance: >500M Ω
- Durability: >500 mating cycles
- Receptacle Housing: PBT, Black
- Overmolding: PVC, Black
- Contact: Copper Alloy
- Coupling Ring: PA66, Black
- Operating Temperature: -40°C ~80°C
- Performance: USB 3.0 or 2.0
- Industrial Seal Rating: IP67
- Cable Length: 1 Meter



Dimensions:

(Shown with USB3A-WTP-QR-CS-JCK)

USB3A-WTP-QR-1M-MM

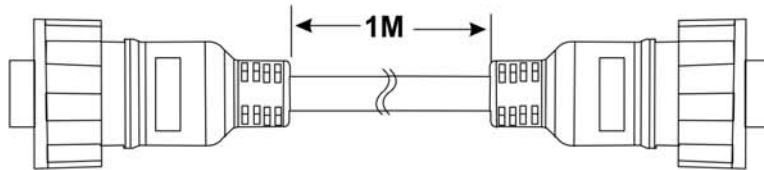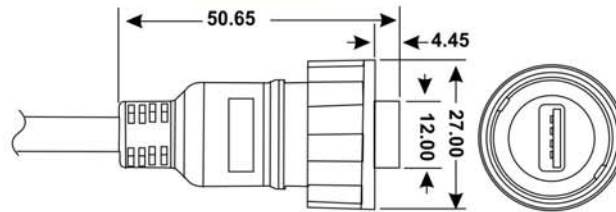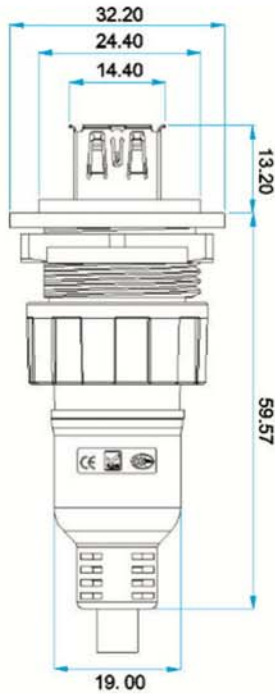

Note: Installation must include space to rotate the cap at least 120 degrees in order to achieve a proper seal.

Units: Millimeters

