



**VIDEO
PRODUCTS
INCORPORATED**


1275 Danner Drive Aurora, Ohio 44202
Tel: 330-562-2622 Fax: 330-562-1999
www.vpi.us

USB3A-WTP-QR-CS-JCK



Specifications:

- Contact Resistance: <math><30\text{m}\Omega</math>
- Dielectric Withstanding Voltage: 1000V/AC
- Insulation Resistance: >500M Ω
- Durability: >500 mating cycles
- Receptacle Housing: PBT, Black
- Overmolding: PVC, Black
- Contact: Copper Alloy
- Coupling Ring: PA66, Black
- Operating Temperature: -40°C ~80°C
- Performance: USB 3.0 or 2.0
- Industrial Seal Rating: IP67

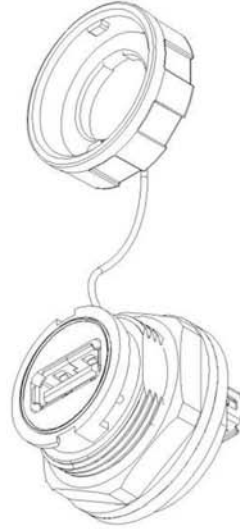


Dimensions:



(Shown with USB3A-WTP-QR-1M-MM)



USB3A-WTP-QR-CS-JCK

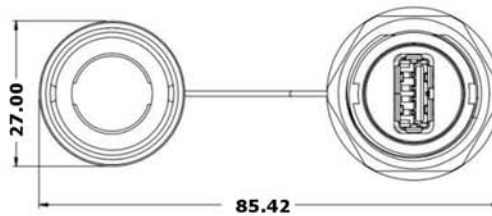

Installation hole figure

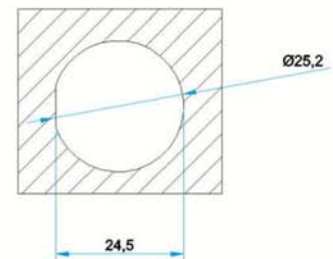

Note: For a proper seal, the rubber gasket (included) must be placed on the inside of the mounting panel.

Units: Millimeters

