



VIDEO  
PRODUCTS  
INCORPORATED

1275 Danner Drive Aurora, Ohio 44202  
Tel: 330-562-2622 Fax: 330-562-1999  
www.vpi.us

## USB3A-WTP-QR-CS-JCK



### Specifications:

Contact Resistance: <math>< 30m\Omega</math>  
Dielectric Withstanding Voltage: 1000V/AC  
Insulation Resistance: >500M $\Omega$   
Durability: >500mating cycles  
Receptacle Housing: PBT, Black  
Overmolding: PVC, Black  
Contact: Copper Alloy  
Coupling Ring: PA66, Black  
Operating Temperature: -40°C ~80°C  
Performance: USB 3.0 or 2.0  
Industrial Seal Rating: IP67  
Thread size: M25x1.25




### Dimensions:



(Shown with USB3A-WTP-QR-1M-MM)



USB3A-WTP-QR-CS-JCK

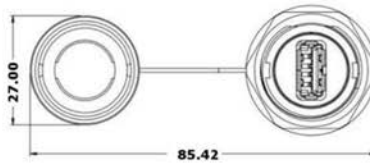

Installation hole figure



**Note:** For a proper seal, the rubber gasket (included) must be placed on the inside of the mounting panel.

Units: Millimeters

