
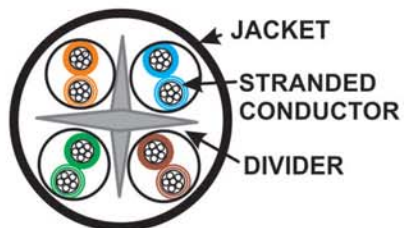


Length-Ft (mm)	Tolerance-+/-In. (mm)
9 (2743)	2.36 (60)
2 (610)	1.18 (30)
Length-Inch (mm)	
8 (203)	1.18 (30)

* Special Order Only



Cross Section View


UNITS: Millimeters

Customer Approval:

Company Name: _____ Date: _____

Authorized Personnel Signature: _____

Authorized Personnel and Title-Printed: _____

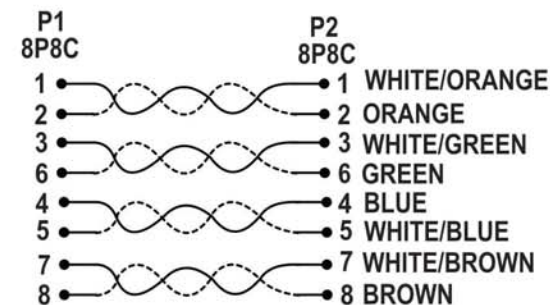

Operating Temperature: -4 to 140°F (-20 to 60°C)
 Storage Temperature: -4 to 176°F (-20 to 80°C)

No.	Component	Description
1	CABLE	CAT6 4P*24 AWG(7/0.196BC) WITH DIVIDER,PVC JACKET, O.D.=6.1mm, 60°C, GRAY
2	CONN.	RJ45 8P8C PLUG, CONTACT:GOLD PLATED 15μ"
3	BOOT	LDPE
4	BOOT	PVC GRAY, SNAGLESS
5	CONSTRUCT.	CABLE WITH NO OVERALL SHIELD AND 4 UNSHIELDED STRANDED TWISTED PAIR RoHS COMPLIANT
6	MARKINGS ON JACKET	AWM 2835, 24AWG,60°C 30V,FT2 ,<UL FILE #>, ETL VERIFIED, CAT6 FTP TIA/EIA 568B.2, CM, 4PR CABLE