




Pr

Customer Spec

L=24 Inches (610mm +/-30mm) VPI P/N: CAT6-RA-2-24GRAY-SHLD

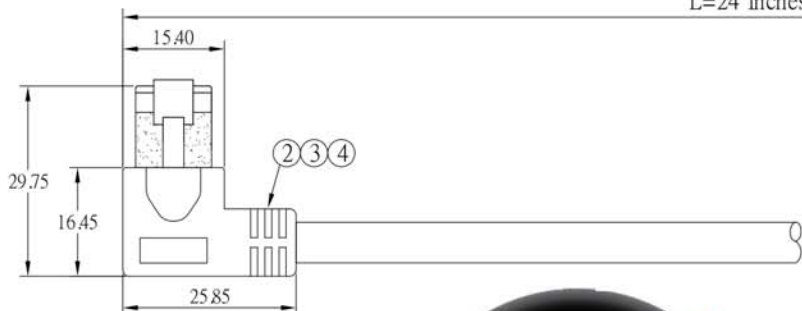


RJ45 Male (Shielded)

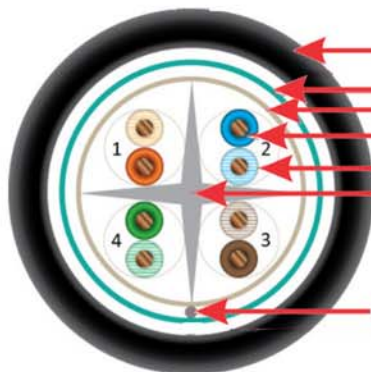


JACKET
ALUMINUM FOIL
PE TAPE
INSULATION
CONDUCTOR
DIVIDER


DRAIN WIRE

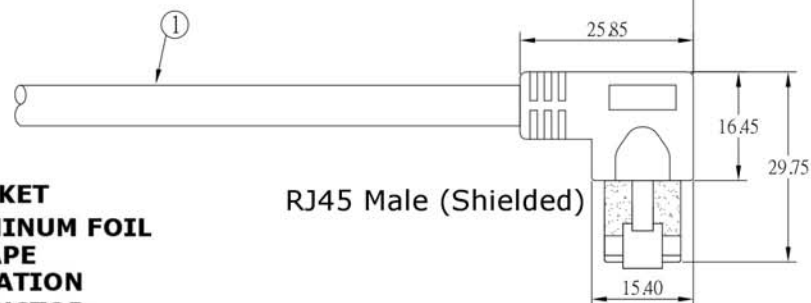

RJ45 Male (Shielded)



UNITS: Millimeters

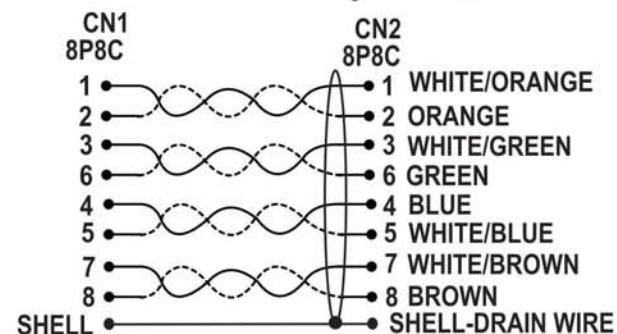

No.	Component	Description
1	CABLE	CAT6 4P*24 AWG(7/0.20BC) WITH DIVIDER,+AL+DRAIN WIRE+PVC JACKET, O.D.=6.2MM 60°C GRAY
2	CONN.	RJ45 8P8C PLUG,SHELL:NICKEL PLATED, CONTACT:GOLD PLATED 15μ"
3	BOOT	LDPE
4	BOOT	PVC 90P GRAY , SNAGLESS
5	CONSTRUCT.	CABLE WITH OVERALL ALUMINUMN FOIL SHIELD AND DRAIN WIRE BUT WITH UNSHIELDED INDIVIDUAL STRANDED TWISTED PAIR ALL MATERIALS RoHS COMPLIANT
6	MARKINGS ON JACKET	AWM 2835, 26AWG,60°C 30V,FT2 ,<UL FILE #>, ETL VERIFIED, CAT6 FTP TIA/EIA 568B.2, CM, 4PR CABLE



VIDEO
 PRODUCTS
 INCORPORATED

1275 Danner Drive Aurora, Ohio 44202
 Tel: 330-562-2622 Fax: 330-562-1999
 www.vpi.us