


Length-Ft (mm)	Tolerance: +/-In. (mm)
2 (610)	1.57 (40)
3 (914.4)	2.36 (60)
6 (1829)	2.36 (60)

UNITS: Millimeters



No.	Component	Description
1	CABLE	CAT6 4P*24 AWG(7/0.20BC) WITH DIVIDER,+AL+DRAIN WIRE+PVC JACKET, O.D.=6.2MM 60°C GRAY
2	CONN.	RJ45 8P8C PLUG,SHELL:NICKEL PLATED, CONTACT:GOLD PLATED 15μ"
3	BOOT	LDPE
4	BOOT	PVC 90P GRAY , SNAGLESS
5	CONSTRUCT.	CABLE WITH OVERALL SHIELD AND DRAIN WIRE BUT WITH UNSHIELDED INDIVIDUAL STRANDED TWISTED PAIR RoHS COMPLIANT
6	MARKINGS ON JACKET	AWM 2835, 24AWG,60°C 30V,FT2 ,<UL FILE #>, ETL VERIFIED, CAT6 STP TIA/EIA 568B.2, CM, 4PR CABLE

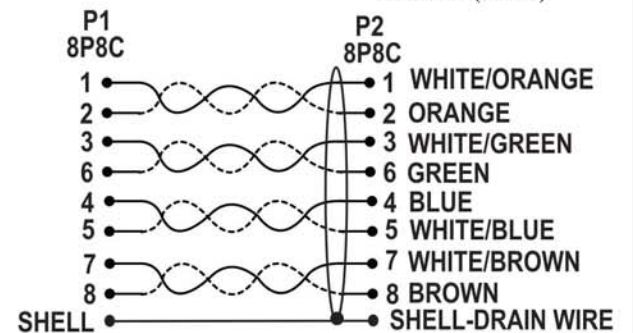

VIDEO PRODUCTS INCORPORATED

1275 Danner Drive Aurora, Ohio 44202
 Tel: 330-562-2622 Fax: 330-562-1999
 www.vpi.us