


Pr Customer Spec



VPI P/N: CAT6-RASV2-xx-color
(xx = LENGTH-see chart color = BLUE or BLACK)

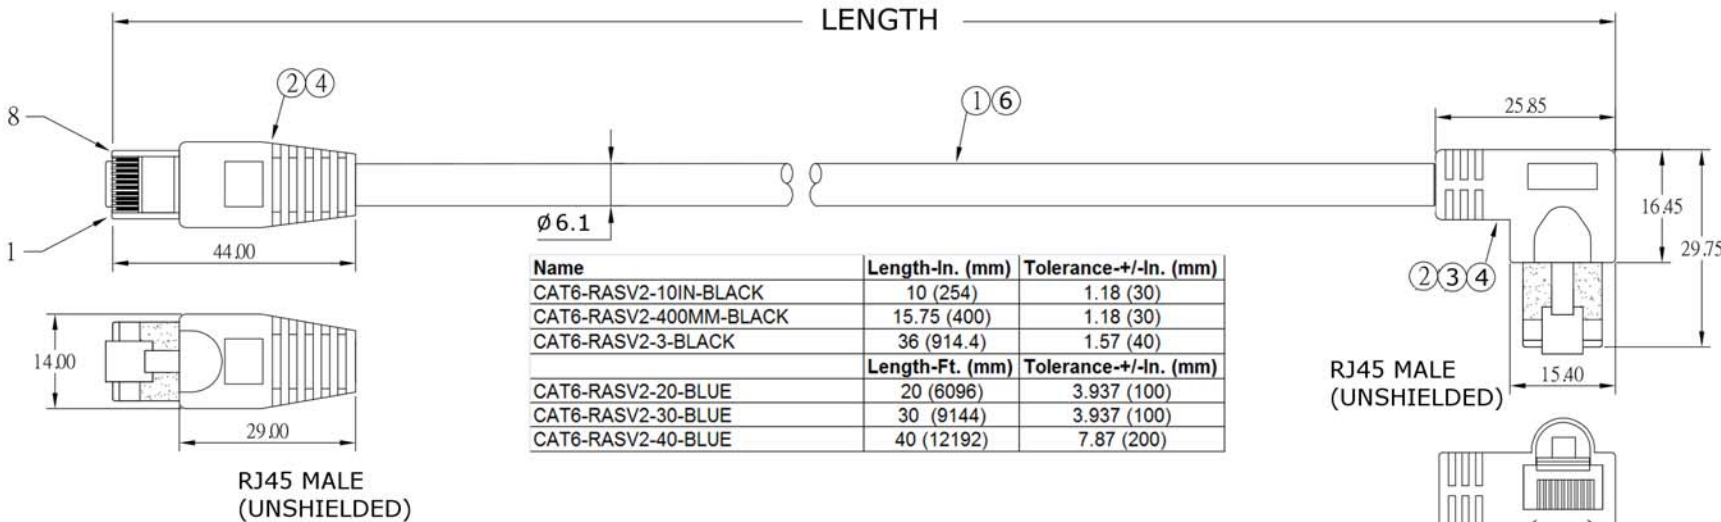

Name	Length-In. (mm)	Tolerance-+/-In. (mm)
CAT6-RASV2-10IN-BLACK	10 (254)	1.18 (30)
CAT6-RASV2-400MM-BLACK	15.75 (400)	1.18 (30)
CAT6-RASV2-3-BLACK	36 (914.4)	1.57 (40)
Length-Ft. (mm)		Tolerance-+/-In. (mm)
CAT6-RASV2-20-BLUE	20 (6096)	3.937 (100)
CAT6-RASV2-30-BLUE	30 (9144)	3.937 (100)
CAT6-RASV2-40-BLUE	40 (12192)	7.87 (200)

RJ45 MALE (UNSHIELDED)

UNITS: Millimeters

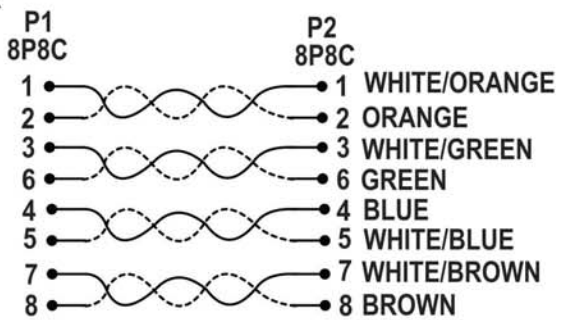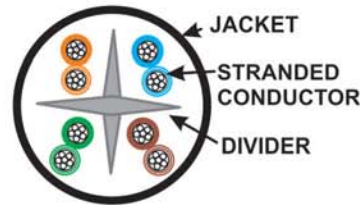

Operating Temperature: -4 to 140°F (-20 to 60°C)
Storage Temperature: -4 to 176°F (-20 to 80°C)

No.	Component	Description
1	CABLE	CAT6 4P*24 AWG(7/0.20BC)+DIVIDER + PVC JACKET, O.D.=6.1mm, 60°C, BLACK or BLUE (as ordered)
2	CONN.	RJ45 8P8C PLUG, UNSHIELDED, CONTACT:GOLD PLATED 15μ"
3	BOOT	LDPE
4	BOOT	PVC SNAGLESS BLACK or BLUE (as ordered)
5	CONSTRUCT.	CABLE WITH NO OVERALL SHIELD AND 4 UNSHIELDED STRANDED TWISTED PAIR ALL MATERIALS ARE RoHS COMPLIANT
6	MARKING ON JACKET	AWM 2835, 24AWG,60°C 30V FT2 <UL FILE #> ETL VERIFIED, CAT6 UTP TIA/EIA 568B.2-1, CM 4PR CABLE

VPI VIDEO PRODUCTS INCORPORATED
1275 Danner Drive Aurora, Ohio 44202
Tel: 330-562-2622 Fax: 330-562-1999
www.vpi.us

8/19/20