



Pr Customer Spec

VPI P/N: CAT6-LAV2-xx-GRAY

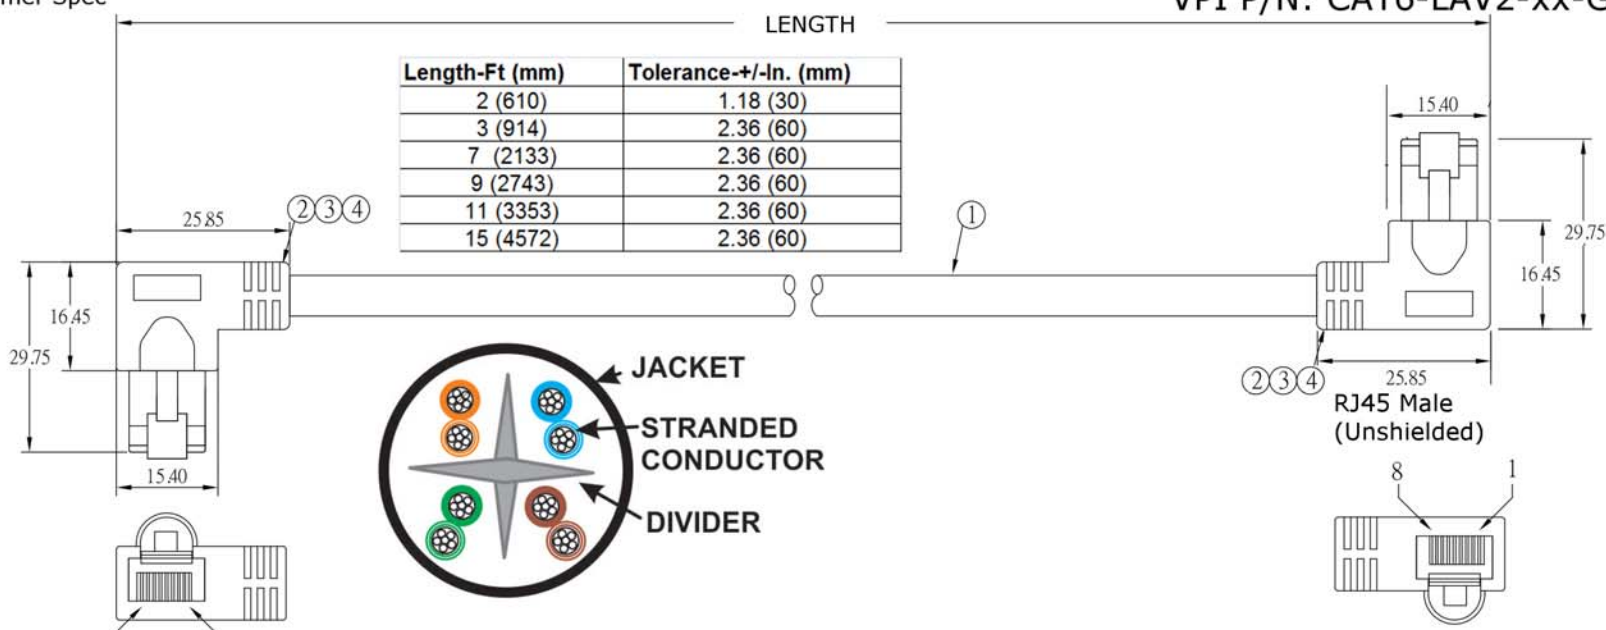

UNITS: Millimeters

Operating Temperature: -4 to 140°F (-20 to 60°C)  
Storage Temperature: -4 to 176°F (-20 to 80°C)

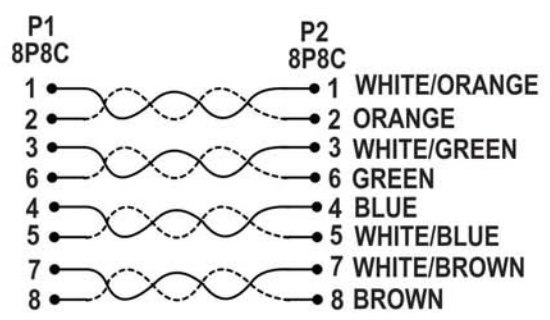

No.	Component	Description
1	CABLE	CAT6 4P*24 AWG(7/0.20BC)+DIVIDER + PVC JACKET, O.D.=6.1mm, 60°C, GRAY
2	CONN.	RJ45 8P8C PLUG, UNSHIELDED, CONTACT:GOLD PLATED 15μ"
3	BOOT	LDPE
4	BOOT	PVC GRAY SNAGLESS
5	CONSTRUCT.	CABLE WITH NO OVERALL SHIELD AND 4 UNSHIELDED STRANDED TWISTED PAIR ALL MATERIALS ARE RoHS COMPLIANT
6	MARKING ON JACKET	AWM 2835, 24AWG,60°C 30V,FT2 ,<UL FILE #>, ETL VERIFIED, CAT6 FTP TIA/EIA 568B.2-1, CM, 4PR CABLE

**VPI** VIDEO PRODUCTS INCORPORATED  
1275 Danner Drive Aurora, Ohio 44202  
Tel: 330-562-2622 Fax: 330-562-1999  
www.vpi.us