


UNITS: Millimeters

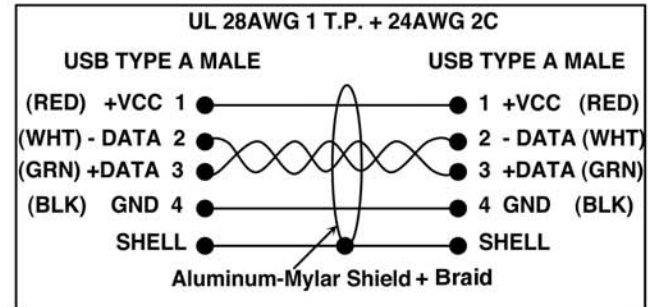

No.	Component	Description
1	CABLE	UL2725 28AWG*1TP+24AWG*2C+AL-MYLAR+ BRAID+DRAIN, 80°C, 30V, O.D.=4.5MM BLACK PVC JACKET
2	CONNECTOR	RIGHT ANGLE USB2.0 TYPE A MALE, WHITE INSULATOR, NICKEL PLATED, PINS 30µ GOLD PLATED
3	CONNECTOR	STRAIGHT USB2.0 TYPE A MALE, WHITE INSULATOR, NICKEL PLATED, PINS 30µ GOLD PLATED
4	MOLD	BLACK PVC 45P
5	MOLD	PE
6	CONSTRUCT.	USB 2.0 COMPLIANT, DRAIN WIRE CONNECTED TO METAL SHELL AT EACH END, ALL MATERIALS ARE RoHS COMPLIANT