


NB


Customer Spec

VPI P/N: CAT6A-UTHNS-xx-BLACK

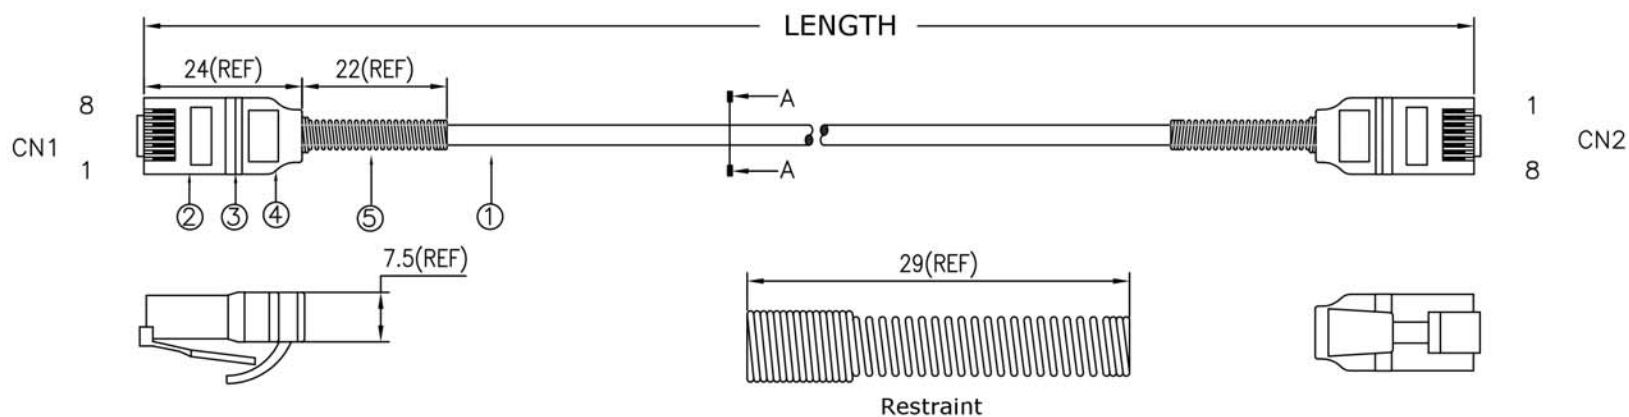


UNITS: Millimeters

Length-Ft (mm)	Tolerance- +/- In. (mm)
1 (304.8)	2.28 (60)
5 (1524)	3.94 (100)
10 (3048)	3.94 (100)
20 (6096)	7.87 (200)

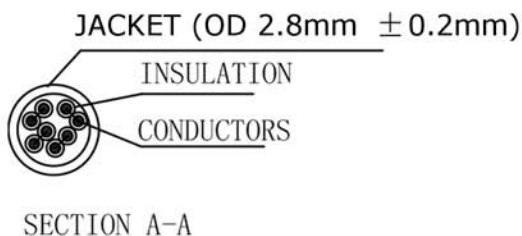

PINOUT: (TIA/EIA 568B Standard)

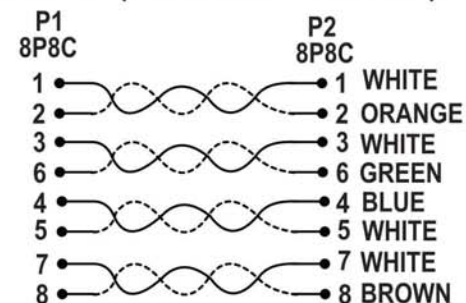

No.	Component	Description
1	CABLE	CAT6A U/UTP 4P*32 AWG(7/0.08BC), PVC JACKET, O.D.=2.8mm, 60°C, BLACK
2	CONN.	RJ45 8P8C TYPE PLUG, CONTACT:GOLD PLATED 3μ"
3	BOOT	PVC, BLACK, SNAGLESS
4	CONSTRUCT.	CABLE WITH NO OVERALL SHIELD AND 4 UNSHIELDED STRANDED TWISTED PAIR ALL MATERIALS ARE RoHS COMPLIANT
5	RESTRAINT	NICKEL PLATED SPRING
6	MARKINGS ON JACKET	CAT6A UTP PATCH CORD 4X2X32AWG



VIDEO
PRODUCTS
INCORPORATED

1275 Danner Drive Aurora, Ohio 44202
Tel: 330-562-2622 Fax: 330-562-1999
www.vpi.us