



	Length-Ft (mm)	Tolerance-+/-In. (mm)	
RJ45 Male Shielded	2 (610)	1.57 (40)	RJ45 Male Shielded
	50 (15240)	6.28 (160)	

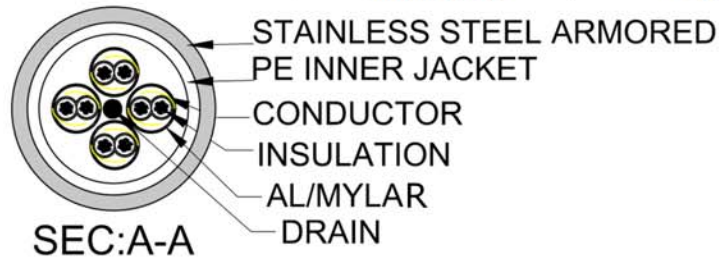

PINOUT:

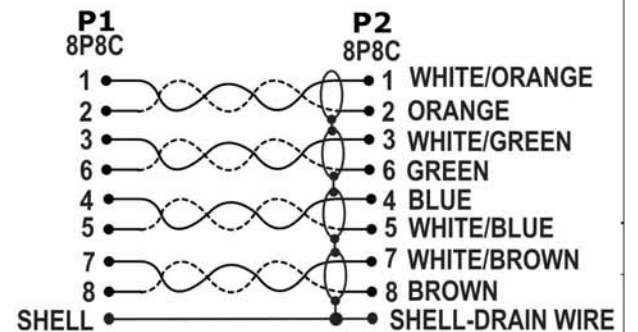

No.	Component	Description
1	CABLE	CAT6A U/UTP 4P*32 AWG(7/0.08BC), PE JACKET, 75°C
2	ARMOR	METAL PROTECTED, SUS304 STAINLESS STEEL, O.D.=4.9mm
3	BOOT	PVC, BLACK, SNAGLESS
4	CONN.	RJ45 8P8C TYPE PLUG, SHELL: NICKEL PLATED, CONTACT: GOLD PLATED 50µ"
5	CONSTRUCT.	CABLE WITH NO OVERALL SHIELD AND 4 SHIELDED STRANDED TWISTED PAIR PLUS DRAIN WIRE ALL MATERIALS ARE RoHS COMPLIANT