

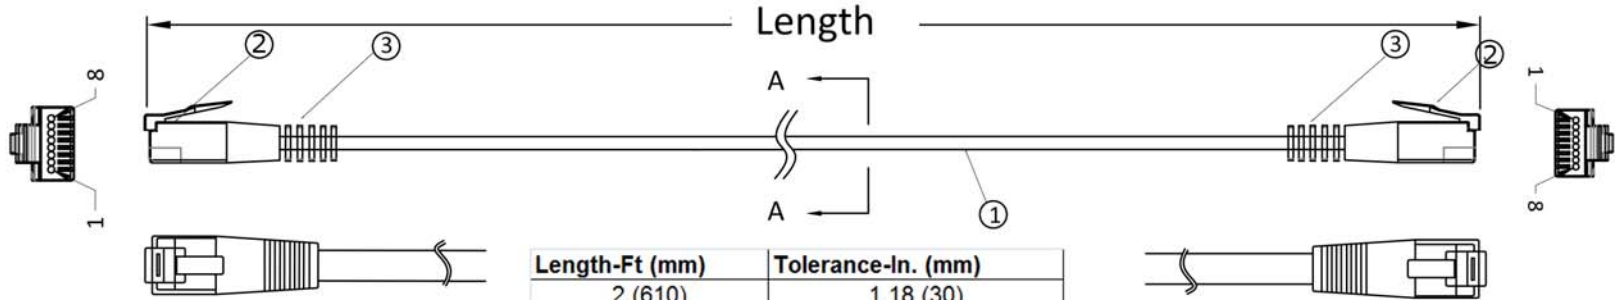


Wd CUSTOMER SPEC

VPI P/N: CAT6-SF-xx-BLACK-IND
(xx= 2,5,10 Feet in Length)

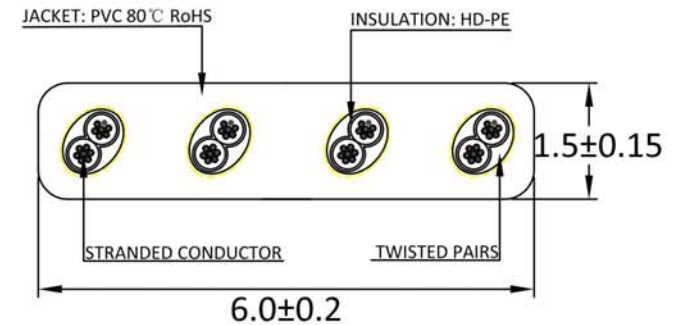

| Length-Ft (mm) | Tolerance-In. (mm) |
|----------------|--------------------|
| 2 (610) | 1.18 (30) |
| 5 (1524) | 2.36 (60) |
| 10 (3048) | 4 (102) |

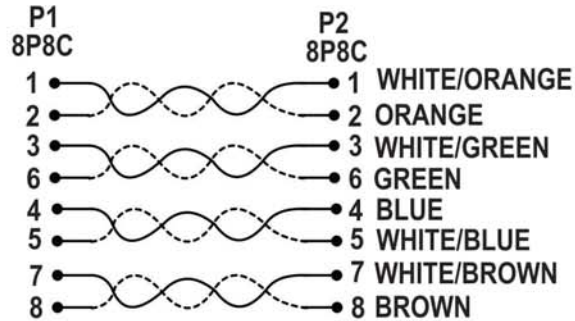

| No. | Component | Description |
|-----|--------------------|---|
| 1 | CABLE | CAT6 U/UTP SUPERFLAT 4P*32 AWG(7/.08BC),PVC JACKET, O.D.=1.5*6.0mm, 80°C, BLACK |
| 2 | CONN. | RJ45 8P8C PLUG, UNSHIELDED, CONTACT:GOLD PLATED 3μ |
| 3 | BOOT | PVC, BLACK, UL94V-O |
| 4 | CONSTRUCT. | CABLE WITH NO OVERALL SHIELD AND UNSHIELDED INDIVIDUAL STRANDED TWISTED PAIR ALL MATERIALS ARE RoHS COMPLIANT |
| 5 | MARKINGS ON JACKET | CAT6 FLAT CABLE RoHS 80°C |

SECTION: A-A

VPI VIDEO PRODUCTS INCORPORATED
1275 Danner Drive Aurora, Ohio 44202
Tel: 330-562-2622 Fax: 330-562-1999
www.vpi.us