Cable Management Panels

1RU Horizontal Cable Management Panel with 5 Metal D-Rings
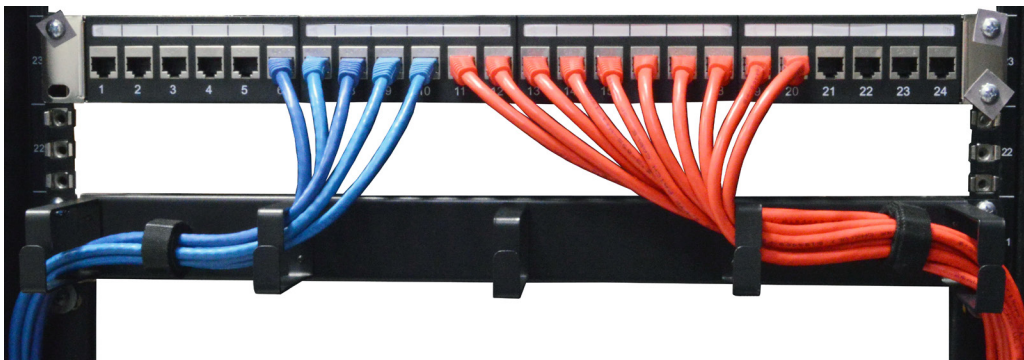

PNL-DRM5-1

- Keeps cable installations neat and organized within a 19" rack/cabinet.
- Closes off open spaces in the rack, promoting proper airflow.
- Five D-rings constructed of sturdy steel accommodate large quantities of cables horizontally – coax, copper, Ethernet, fiber optic, A/V, etc.
- Provides cable strain relief and helps prevent inadvertent disconnects for more reliable installations.
- Designed to fit standard 19" racks and cabinets.
  - Easy to install in the front or back of the rack.
- 1RU in height.
- High quality, rugged steel construction with durable powder coat finish.
- Ideal for use in data centers, server rooms, A/V racks, and any application with large cable installations.
- Dimensions:
  - Panel dimensions (with D-Rings installed) WxDxH: 19x3.4x1.75 in (483x86x44mm)
  - D-Ring dimensions WxDxH:
    - Inside: 0.47x2.5x1.45 in (12x64x37 mm)
    - Outside: 0.47x3.01x1.56 in (12x76x40 mm)
    - Spacing between D-rings: 4.27 in (109 mm)
- Material: 1.4mm SPCC steel

1RU Horizontal Cable Management Panel with 5 Plastic D-Rings

PNL-DRP5-1

- Keeps cable installations neat and organized within a 19" rack/cabinet.
- Closes off open spaces in the rack, promoting proper airflow.
- Five D-rings constructed of ABS plastic accommodate large quantities of cables horizontally – coax, copper, Ethernet, fiber optic, A/V, etc.
- Provides cable strain relief and helps prevent inadvertent disconnects for more reliable installations.
- Designed to fit standard 19" racks and cabinets.
  - Easy to install in the front or back of the rack.
- 1RU in height.
- Panel constructed of high quality, rugged steel with durable powder coat finish.
- Ideal for use in data centers, server rooms, A/V racks, and any application with large cable installations.
- Dimensions:
  - Panel dimensions (with D-Rings installed) WxDxH: 19x3.07x1.75 in (483x78x44mm)
  - D-Ring dimensions WxDxH:
    - Inside: 0.40x2.08x1.21 in (10x53x31 mm)
      - ◊ Height ranges from 1.06 in (27 mm) to 1.21 in (31 mm).
    - Outside: 0.40x2.68x1.69 in (10x68x43 mm)
    - Spacing between D-rings: 4.27 in (109 mm)
- Material:
  - Panel: 1.4mm SPCC steel
  - D-Ring: ABS plastic

Keep cable installations neat and organized within a 19" rack/cabinet