

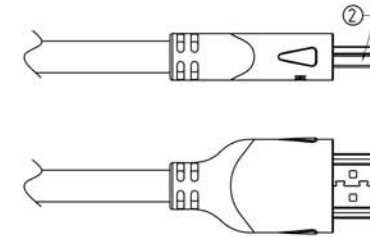


WIRE DETAILS

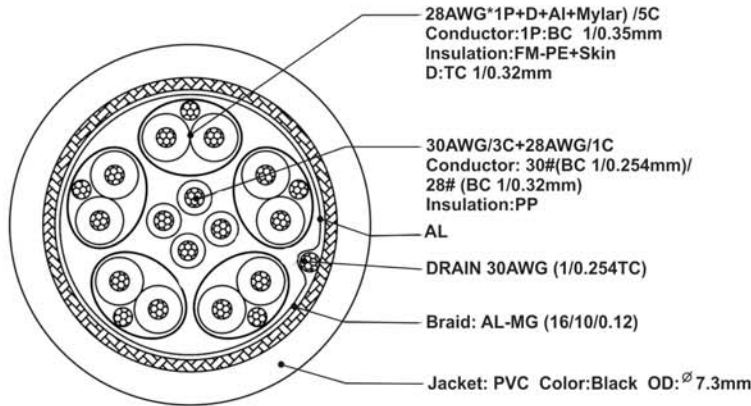

PINOUT:

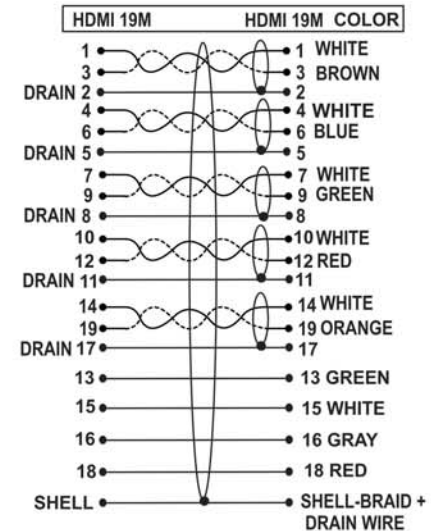

UNITS: Millimeters

Electrical Characteristics:

- 1)100% Open/short/Intermittent testing
- 2)Withstanding voltage:DC 300V AT 10ms.
- 3)Insulation resistance:5M Ohm(min)
- 4)Residual operating current: 2.0mA
- 5)Conductive resistance:5 Ohm(Max)

No.	Component	Description
1	CABLE	HDMI (28AWG (1/0.35BC)*1P+D(1/0.32TC)+AL/ML)*5P + 30AWG(1*0.254BC)*3C+28AWG(1/0.32BC)*1C+AL+30AWG(1*0.254TC)+ B(16/10/0.12 AL-MG)+PVC JACKET OD 7.3mm, JACKET BLACK
2	CONNECTOR	HDMI-19P MALE, 2.1 TYPE A PIN: GOLD FLASH, SHELL: GOLD FLASH PLATED STEEL, SOLDER TYPE
3	COPPER FOIL	DOUBLE-SIDED CONDUCTIVE COPPER FOIL, L30*W5mm, STRONG ADHESIVE TYPE
4	TINPLATE	HDMI 2.1 TINPLATE, NICKEL PLATED
5	INNERMOLD	PE, LOW DENSITY
6	OVERMOLD	PVC, 45Pa, BLACK
7	CONSTRUCTION	CABLE HAS OVERALL SHIELD AND DRAIN WIRE WITH FIVE SHIELDED STRANDED TWISTED PAIR + FOUR INDIVIDUALLY STRANDED CONDUCTORS, ALL MATERIALS ARE ROHS COMPLIANT