


Pr

Customer Spec


VPI P/N: CAT6-RASV2-xx-GRAY-SHLD (26)

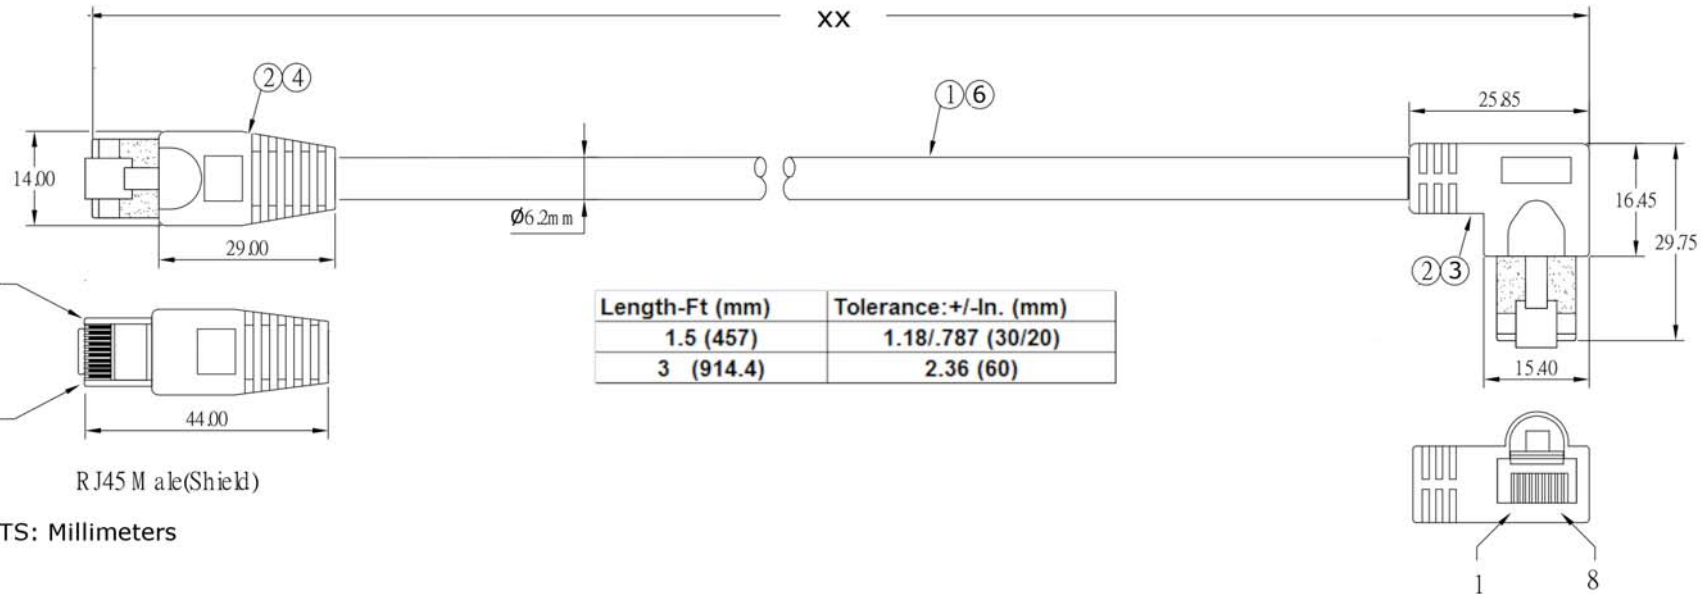

Length-Ft (mm)	Tolerance:+/-In. (mm)
1.5 (457)	1.18/.787 (30/20)
3 (914.4)	2.36 (60)

RJ45 Male(Shield)

UNITS: Millimeters

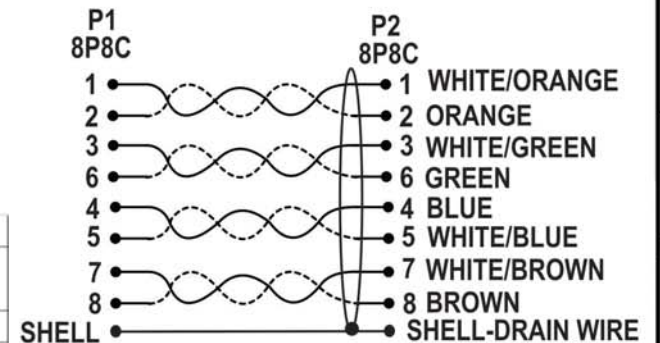

No.	Component	Description
1	CABLE	CAT6 4P*26 AWG(7/0.16BC) WITH DIVIDER,+AL+DRAIN WIRE+PVC JACKET, O.D.=6.2MM 60°C GRAY
2	CONN.	RJ45 8P8C PLUG,SHELL:NICKEL PLATED, CONTACT:GOLD PLATED 15μ"
3	BOOT	LDPE SNAGLESS
4	BOOT	PVC 70P GRAY , SNAGLESS
5	CONSTRUCT.	CABLE WITH OVERALL SHIELD AND DRAIN WIRE BUT WITH UNSHIELDED INDIVIDUAL STRANDED TWISTED PAIR ALL MATERIALS RoHS COMPLIANT
6	MARKINGS ON JACKET	AWM 2835, 26AWG,60°C 30V,FT2 ,<UL FILE #>, ETL VERIFIED, CAT6 FTP TIA/EIA 568B.2, CM, 4PR CABLE

VPI VIDEO PRODUCTS INCORPORATED

1275 Danner Drive Aurora, Ohio 44202
 Tel: 1-800-626-7801 Fax: 330-562-1999
 www.vpi.us sales@vpi.us