


Name	Length-In. (mm)	Tolerance-+/-In. (mm)
CAT6-UASV2-5-BLACK-SHLD	60 (1524)	2.36 (60)
CAT6-UASV2-7-BLACK-SHLD	84 (2133)	2.36 (60)

PINOUT:



No.	Component	Description
1	CABLE	CAT6 4P*24 AWG(7/0.20BC) WITH DIVIDER +AL + DRAIN WIRE + PVC JACKET, O.D.=6.2mm, 60°C, BLACK
2	CONN.	RJ45 8P8C PLUG, SHIELDED, CONTACT:GOLD PLATED 15μ"
3	BOOT	LDPE
4	BOOT	PVC BLACK SNAGLESS
5	CONSTRUCT.	CABLE WITH OVERALL SHIELD AND DRAIN WIRE BUT UNSHIELDED INDIVIDUAL STRANDED TWISTED PAIR ALL MATERIALS ARE RoHS COMPLIANT
6	MARKING ON JACKET	AWM 2835, 24AWG,60°C 30V,FT2 ,<UL FILE #>, ETL VERIFIED, CAT6 UTP TIA/EIA 568B.2-1, CM, 4PR CABLE

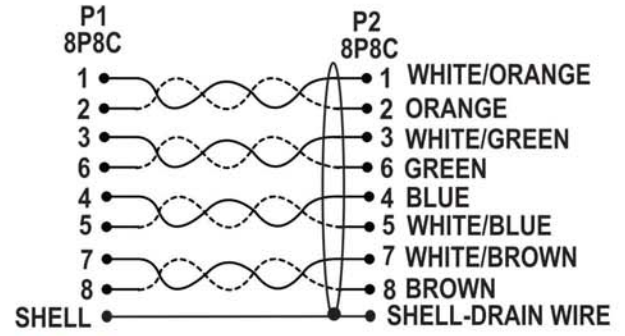

VIDEO PRODUCTS INCORPORATED  
1275 Danner Drive Aurora, Ohio 44202  
Tel: 330-562-2622 Fax: 330-562-1999  
www.vpi.us