




RoHS
IP66~68





RECOMMENDED
PANEL CUT OUT



Pin Assignment
Front View



Pin Assignment
Rear View

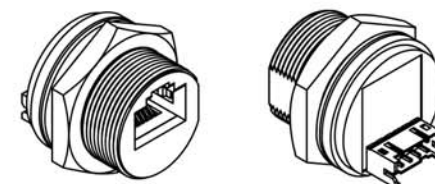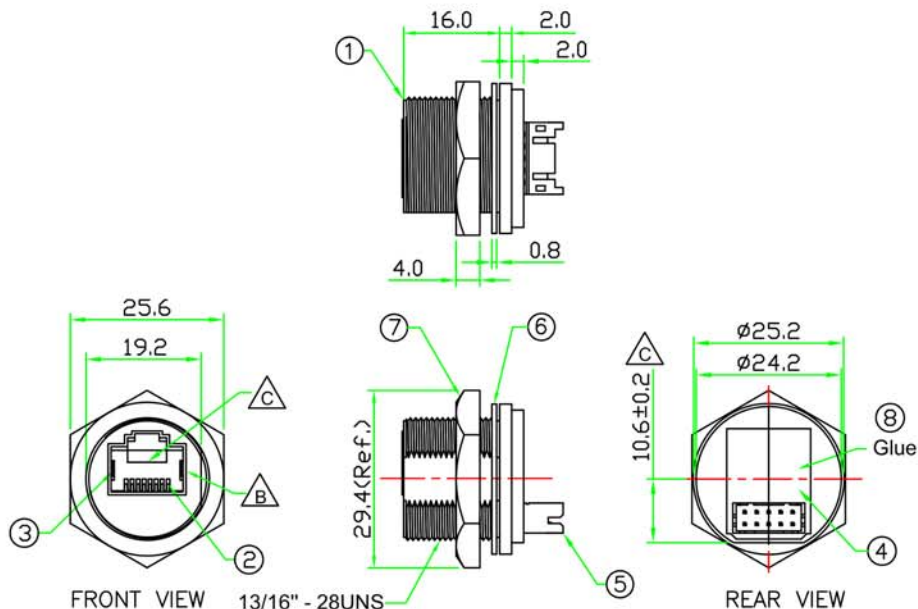

NOTES:

1. Current Rating: 1A
2. Voltage Rating: 150 VAC Max.
3. Connector Temperature Range: -25°C to 85°C
4. Contact Resistance: $\leq 30\text{m}\Omega$
5. Insulation Resistance: $\geq 100\text{M}\Omega$
6. Dielectric Withstanding Voltage:
1KVrms at 60Hz, 1 minute between adjacent contacts.
1.5KVrms at 60Hz, 1 minute between shield and contacts.
7. Request Panel Thickness Max. 4.0

UNITS: Millimeters

8	GLUE	EPOXY.	BLACK		
7	HEX NUT	NYLON+GF.	BLACK	1	
6	GASKET	EPDM.	BLACK	1	
5	WAFER	Pitch 2.0mm 5 PIN x 2 ROW, Straight wafer.	NATURE	1	
4	PCB	FR4. Double Side, 1.0mm Thickness.		1	
3	GROUND	Ground Contact. SUS304.		2	
2	CONTACT	RJ45 PIN Contact. Phos. Bronze 50u" Gold Plating.		8	
1	CONNECTOR	RJ45 JACK Connector INSERT. NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

RJ45-WTP-SW2R-JCK



UNIT: mm

TITLE: RJ45 Jack C Size Panel Connector
Screw Type Round Flange
10P Straight Wafer

SCALE

1:1

UNLESS OTHERWISE
SPECIFIED TOLERANCES:

.XX ± 0.5 .XX ± 0.25

.XXX ± 0.1 ANGLE ± 1°

REV. SHEET

C 1/1



VIDEO
PRODUCTS
INCORPORATED
1275 Danner Drive Aurora, Ohio 44202
Tel: 330-562-2622 Fax: 330-562-1999
www.vpi.us