



1 Foot +/- 1.57 Inch (305 +/- 40mm)

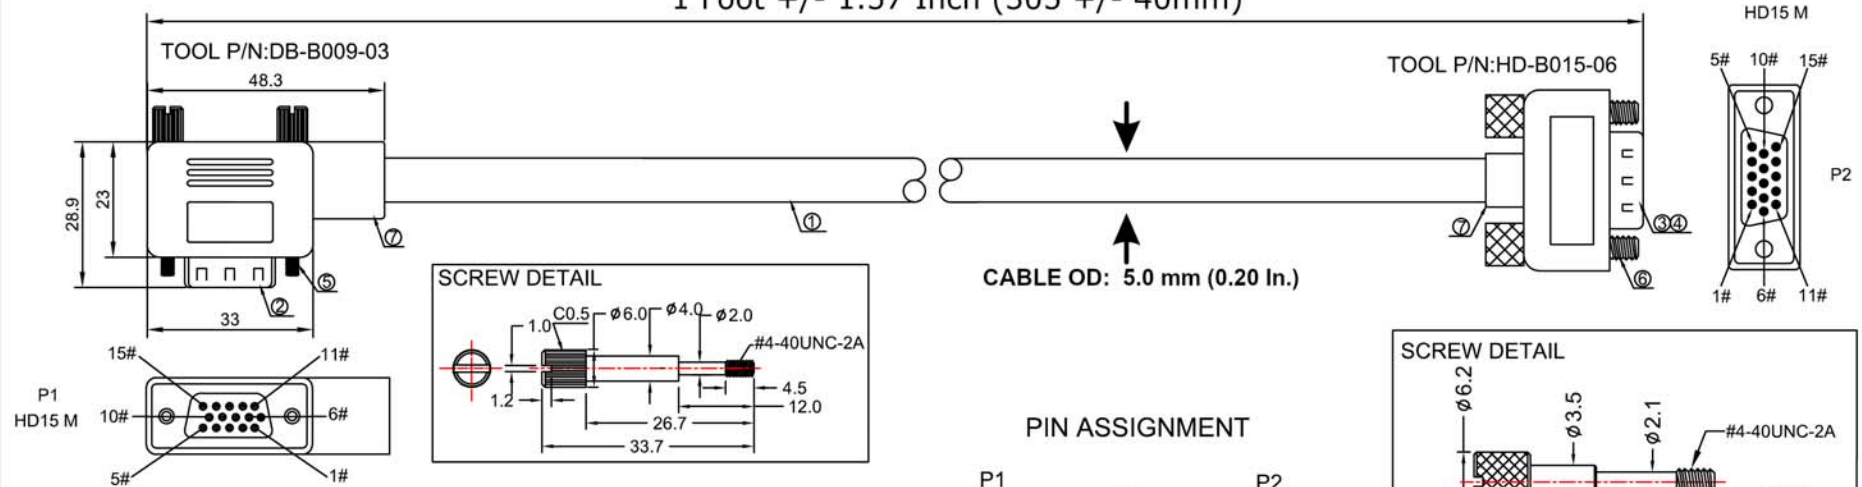

CABLE OD: 5.0 mm (0.20 In.)

PIN ASSIGNMENT

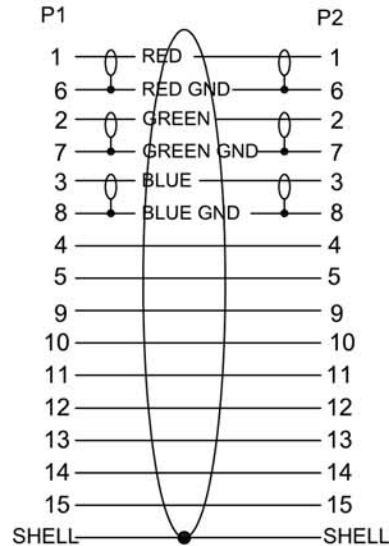

UNITS: Millimeters

7	ALL CONNECTORS OVERMOLD BLACK PVC.
6	SCREW:#4-40UNC 6.2*25.3MM NICKEL PLATED.
5	SCREW:#4-40UNC 6.0*33.7MM NICKEL PLATED.
4	TERMINAL OD:0.76MM GOLD PLATED 1U"
3	HD15 MALE,BLUE INSULATOR,SOLDER TYPE AFTER NUT.
2	HD15 MALE,BLUE INSULATOR,SOLDER TYPE.
1	(32AWG*3COAX+S+F+AM-30AWG*9C)+AL+B OD:5.0MM BLACK PVC JACKET UL20276.
NO.	Description

NOTES:

1. PIN ASSIGNMENT SEE TO WIRE LIST.
2. ELECTRICAL TEST CONDITION:
 - (a).100%OPEN,SHORT & MISWIRE TEST,
 - (b). INSULATOR RESISTANCE:20 Mohm MIN. DC 300V 0.01sec.
 - (c). CONTACT RESISTANCE:3ohm MAX.



VIDEO PRODUCTS INCORPORATED

1275 Danner Drive Aurora, Ohio 44202
 Tel: 330-562-2622 Fax: 330-562-1999
 www.vpi.us