



BI Customer Spec

VPI P/N: CAT6-WTP-xx-BLACK-SHLD
(xx= 3/7/15/25/50/100/150/175 FT)

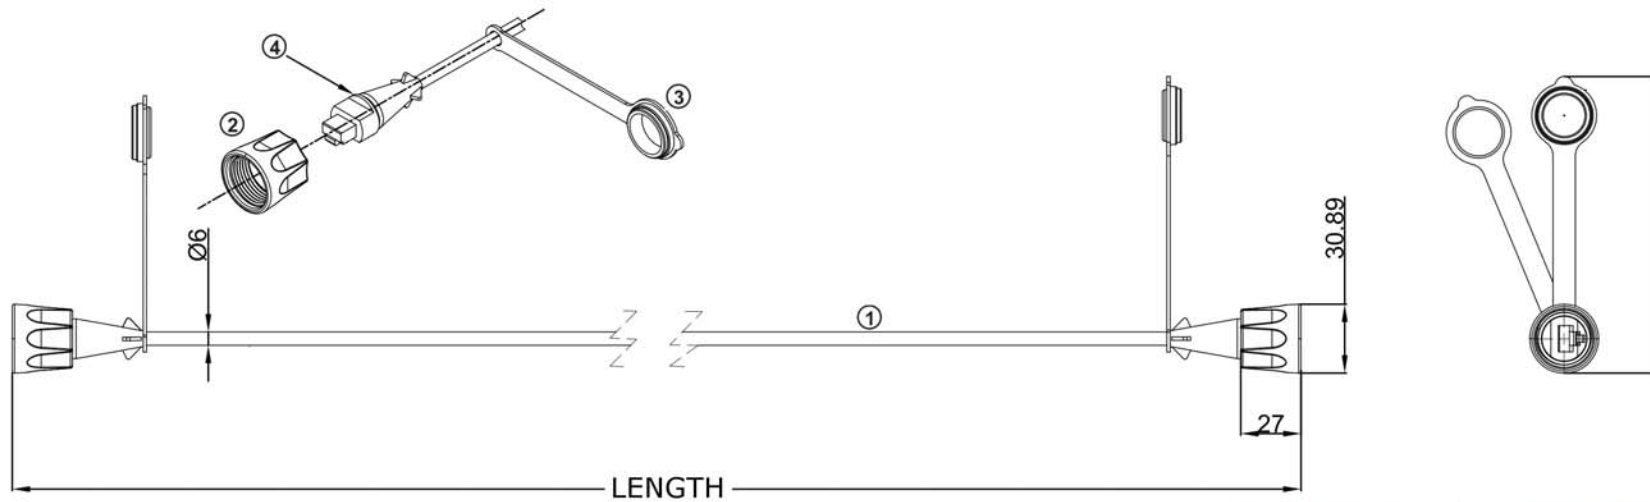

UNITS: Millimeters

Cable Cross Section View

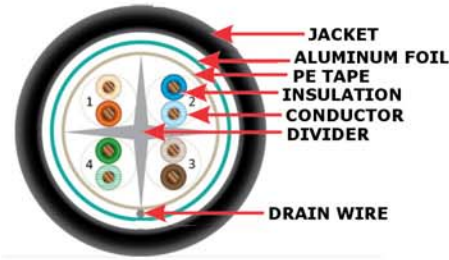

| Length-Ft (mm) | Tolerance-+/-In. (mm) |
|----------------|-----------------------|
| 3 (914) | 2 (51) |
| 7 (2133) | 4 (102) |
| 15 (4572) | 4 (102) |
| 25 (7620) | 4 (102) |
| 50 (15240) | 6.28 (160) |
| 100 (30480) | 7.87 (200) |
| 150 (45720) | 7.87 (200) |
| 175 (53340) | 7.87 (200) |

| No. | Component | Description |
|-----|-------------------|---|
| 1 | CABLE | CAT6 4P*26 AWG(7/0.15BC)WITH DIVIDER+AL+DRAIN WIRE+PVC JACKET, O.D.=6MM 75°C BLACK |
| 2 | CONNECTOR | |
| 2 | NUT | PBT, Waterproof |
| 3 | DUST COVER | PVC, Waterproof |
| 4 | O-ring | Waterproof, Ø 1.8mm |
| 5 | CONSTRUCTION | CABLE WITH OVERALL SHIELD AND DRAIN WIRE BUT UNSHIELDED INDIVIDUAL STRANDED TWISTED PAIR ALL MATERIALS ARE RoHS COMPLIANT |
| 6 | MARKING ON JACKET | "TYPE CMX OUTDOOR 75°C (FILE NUMBER) 26AWG 4PR ETL VERIFIED TO ANSI/TIA-568-C.2 PATCH CABLE FTP CAT6" |

