


OD

CUSTOMER SPEC


VPI P/N: DP-WTP-WMRM-2M

Page 1 of 2

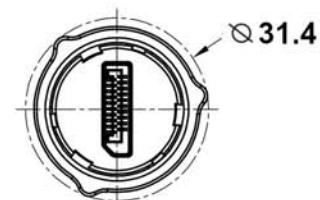

Conn.1

DisplayPort Male


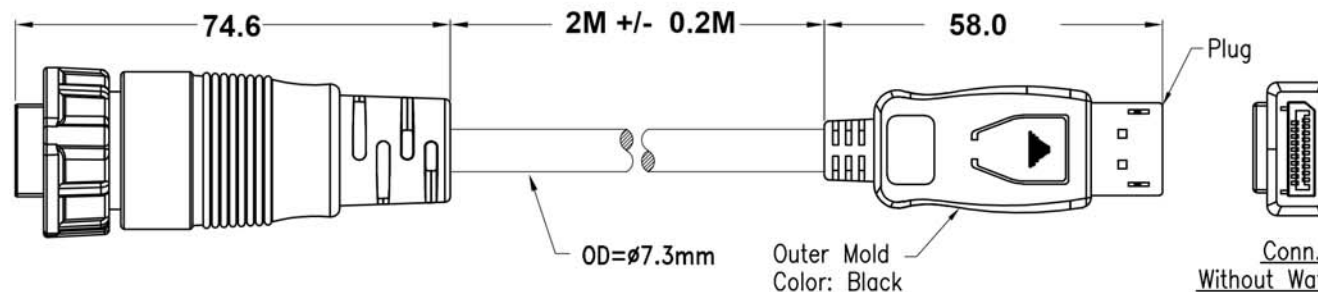


OD=7.3mm



Outer Mold
Color: BlackConn.2
Without Waterproof
DisplayPort Male

Note:

1. Waterproof Rate: IP67
(No Ingress Of Dust/ Protected Against Harmful Effects Caused In 1 Meter Water Within 30 Minutes With Mating.)
2. Temperature Range: -20°C to +80°C
3. Material:
Shell: Nylon, Black
Housing: LCP, Black
Pin: Copper Alloy, Gold Plated
Lock Nut: Zinc Alloy, Nickel Plated
Plug: DP, Nickel Plated, Shielded
Gasket: Rubber
4. Cable:
UL20276, (28AWG*1P+30AWG*1C+Al.Mylar)*5+26AWG*1C+28AWG*4C+Drain+Filler+Al.Mylar+Braid, PVC Jacket, UV Resistant, Black, OD=7.3mm

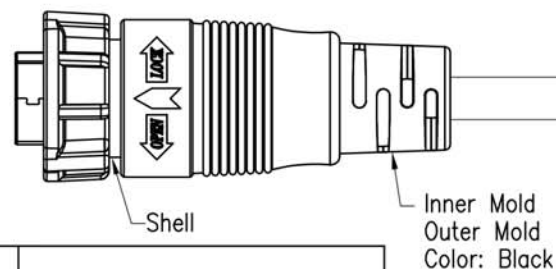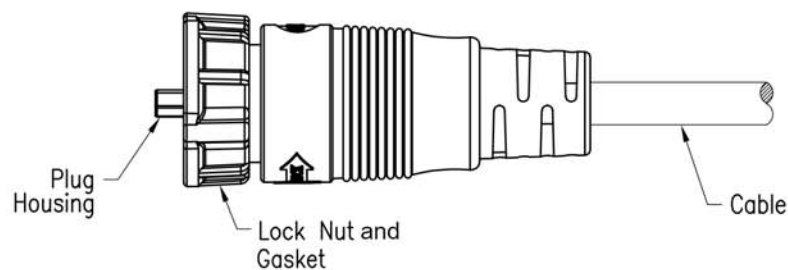

UNITS: Millimeters

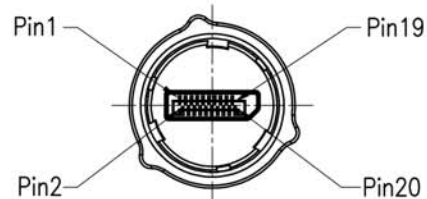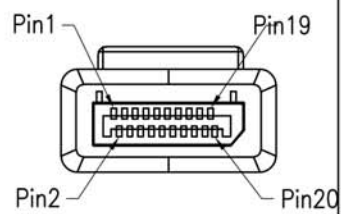Conn.1
Pin Assignments Front ViewConn.2
Pin Assignments Front View
VPI VIDEO
PRODUCTS
INC

 1275 Danner Drive Aurora, Ohio 44202
 Tel: 330-562-2622 Fax: 330-562-1999
 www.vpi.us

Shield	Braid	Shield
	Drain Wire	
	Red 26AWG	
20	N/A	20
19	Yellow 28AWG	19
18	Orange 28AWG	18
17	Brown 28AWG	17
16	Drain Wire 30AWG	16
15	White 28AWG	15
14	White 28AWG	14
13	Green 28AWG	13
12	Black 28AWG	1
11	Drain Wire 30AWG	2
10	White 28AWG	3
9	Blue 28AWG	4
8	Drain Wire 30AWG	5
7	White 28AWG	6
6	Green 28AWG	7
5	Drain Wire 30AWG	8
4	White 28AWG	9
3	Red 28AWG	10
2	Drain Wire 30AWG	11
1	White 28AWG	12
Conn.1	Wire Color	Conn.2
Pin Out		



1275 Danner Drive Aurora, Ohio 44202
Tel: 330-562-2622 Fax: 330-562-1999
www.vpi.us