


NOTE:

- CABLE: UL2919 1354(S)28#*3C+28#*4PR+AEB 85%
OD:8.9MM COLOR:P207 (W95051611) ☒
- MARKING: ♪AWM E101344-D STYLE 2919 VW-1 80°C 30V LOW
VOLTAGE COMPUTER CABLE Video Products Inc WWW.VPI.US
- CONNECTOR: HDD15P M NO 9 GOLD PLATED PIN
NICKEL SHELL, BLACK INSULATOR
- CONNECTOR: HDD15P F GOLD PLATED PIN
NICKEL SHELL, BLACK INSULATOR
- METAL: HDD15P SHORT TYPE, TIN PLATED
- THUMBSCREW: Q TYPE 4.5*48.1MM #4-40 UNC K782
- PVC: COLOR:V294, 45P, MOLDING TOOL:M2-D15-414
- COVER: DUST COVER HDD15P BLACK. ☒

ELECTRONIC TEST:

- OPEN/SHORT/INTERMITTENCE: 100%.
- HI-POT: 300V AC/sec
- INSULATION RESISTANCE: 20MΩ (MIN)
- CONDUCTIVE RESISTANCE: 2Ω (MAX)
CB4064: 10Ω (MAX)
CB4063,CB4088,CB4090: 6Ω (MAX)
- CPK Measure point Y1-Y3.


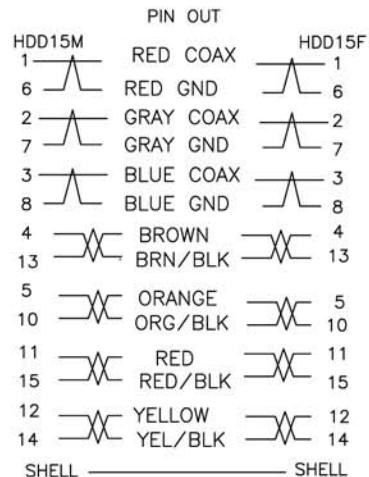


CB4064	30500±100MM
CB4063	15240±100MM
CB4062	7620±75MM
CB4083	4575±50MM
CB4088	22860±100MM
CB4090	10670±100MM
CB4164	915±30MM
CB4072	3048±50MM
CB4070	1830±50MM

VPI VIDEO PRODUCTS INCORPORATED

1275 Danner Drive Aurora, Ohio 44202
Tel: 1-800-626-7801 Fax: 330-562-1999
www.vpi.us sales@vpi.us

Part #: VEXT-xx

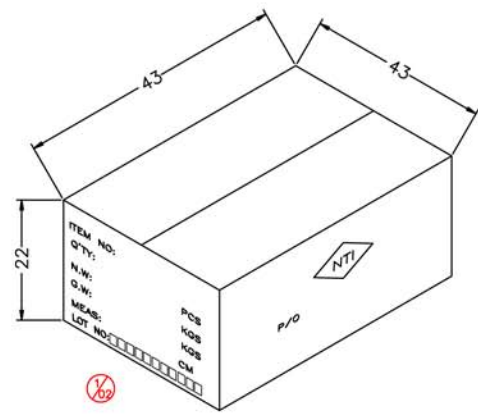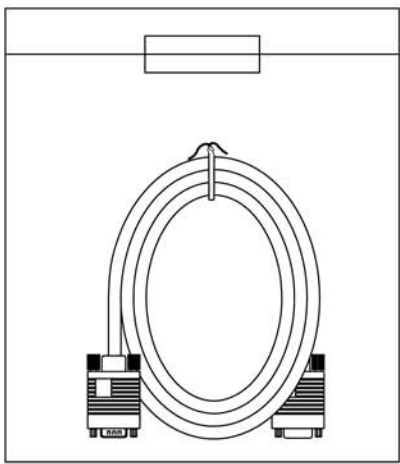

1	CB4164	3ft	100	7"*9"*0.06MM	120MM*1
2	CB4083	15ft	30	10"*12"*0.06MM	200MM*2
3	CB4062	25ft	20	12"*12"*0.06MM	250MM*2
4	CB4090	35ft	16	14"*14"*0.06MM	250MM*2
5	CB4063	50ft	12	14"*14"*0.06MM	300MM*2
6	CB4088	75ft	8	15"*15"*0.06MM	400MM*2
7	CB4064	100ft	6	15"*15"*0.06MM	450MM*2
8	CB4072	10ft	40	9"*11"*0.06MM	180MM*1
9	CB4070	6ft	50	7"*11"*0.06MM	120MM*1

WATERPROOF BAG: 36"*30"*0.06MM
 CARTON: 43*43*22cm



1275 Danner Drive Aurora, Ohio 44202
 Tel: 1-800-626-7801 Fax: 330-562-1999
 www.vpi.us sales@vpi.us