


VPI P/N: VEXT-xx
(xx=3, 6, 10, 15, 25, 35, 50 Feet)

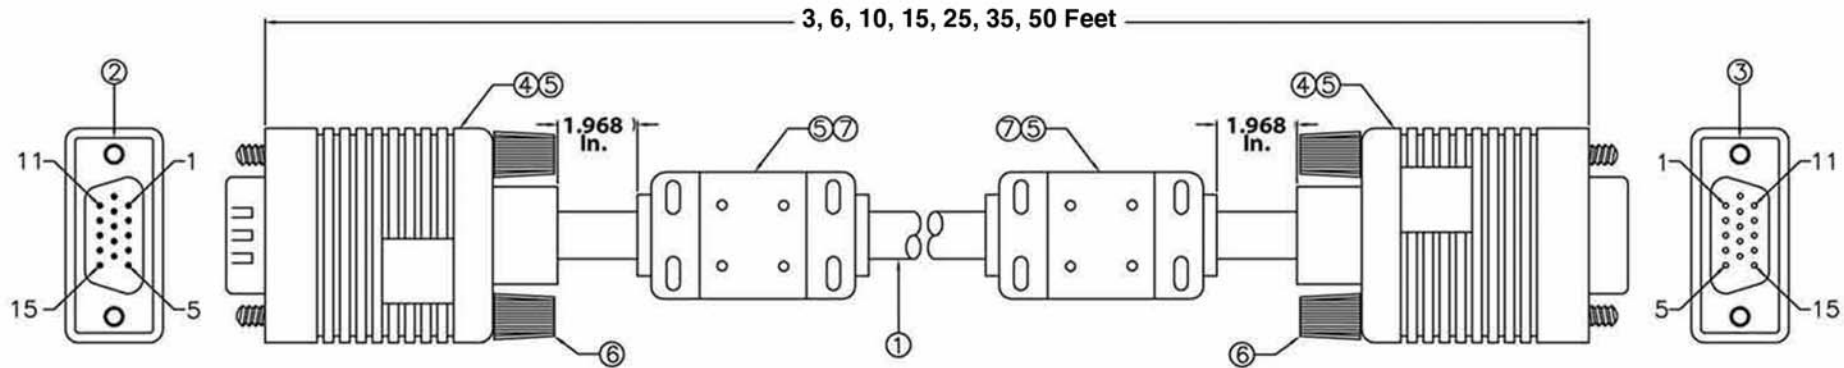


Conn.1 HDB15P/M

Conn.2 HDB15P/F

Note: VEXT-3 has only one ferrite core (on the male connector end). The other cable lengths each have 2 ferrite cores, one on each end.

Pin Assignment

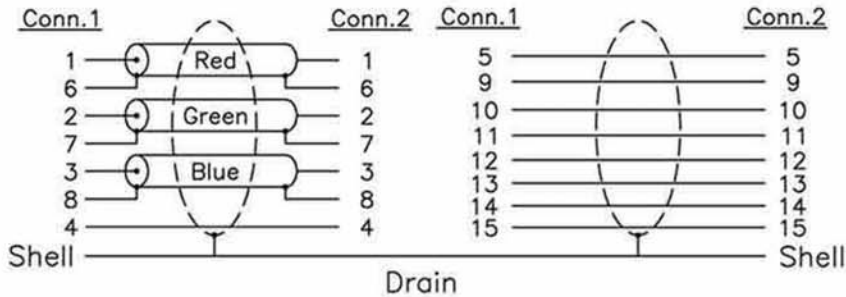

Electrical Test:

- 1.100% Test,(Open,Short,Mis-wire)
- 2.Contact Resistance: 5 Ohm max
- 3.Insulation Resistance: 10M ohm min
- 4.Hit-pot: 300V DC/10ms

RoHS Compliant

NO.	P/N	DESCRIPTION	Q'TY	UNIT
⑦	24-01001	Ferrite core:17.5*28.5*9.5mm	2	PCS
⑥	23-20002	Screw:#4-40 2.3*45mm	4	PCS
⑤	41-45001	Outside Molding:45P PVC Black	0.064	KG
④	42-00001	Inside Molding:PE	0.009	KG
③	11-15004	HDB15P Female,Shell Nickel Plated	1	PCS
②	11-15003	HDB15P Male,Shell Nickel Plated	1	PCS
①	01-12001	UL2919[(28AWG+D+AL)*3Coax+30AWG*9C]+AL+D+B OD:8.0mm Jacket Color:Black		

VPI VIDEO PRODUCTS INCORPORATED
1275 Danner Drive Aurora, Ohio 44202
Tel: 1-800-626-7801 Fax: 330-562-1999
www.vpi.us sales@vpi.us