


Part #: VEXT-THN-xx

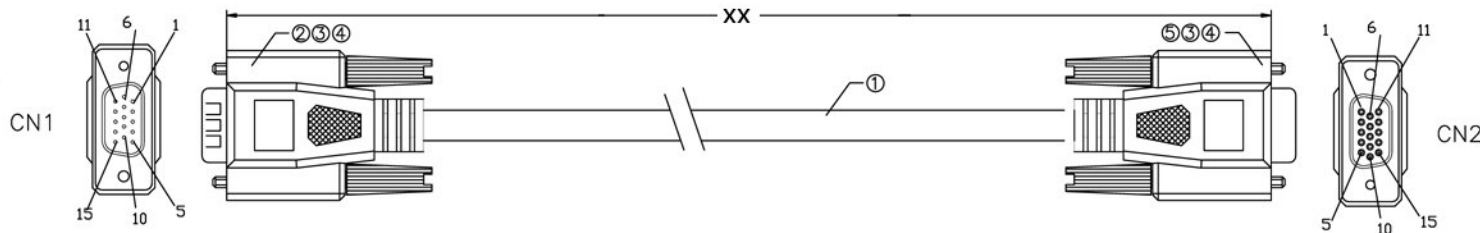

NOTE:

1. CABLE: UL2919 (30AWG*1C+EAM)*3C+30AWG*9C+AEB 65% OD=5.5mm
 COLOR:BEIGE
 MARKING: 5JAWM E101344-C STYLE 2919 VW-1 80°C 30V LOW
 VOLTAGE COMPUTER CABLE Video Products Inc WWW.VPI.US
2. CONNECTOR: HDD15 MALE GOLD PLATED PIN
 NICKEL SHELL, BLACK INSULATOR
3. THUMBSCREW: 4*30.5mm COLOR:BEIGE
4. MOLDING PVC: 45P COLOR:BEIGE
5. CONNECTOR: HDD15 FEMALE GOLD
 PLATED PIN NICKEL SHELL, BLACK INSULATOR

ELECTRONIC TEST:

- A. OPEN/SHORT/INTERMITTENCE: 100%.
 - B. HI-POT: 300V AC/sec
 - C. INSULATION RESISTANCE: 20MΩ (MIN)
 - D. CONDUCTIVE RESISTANCE: 2Ω (MAX)
- NOTE: 35/50 foot : 6 OHM (MAX) : 3mA(MAX)

CN1		PIN OUT	CN2	
1		RED COAX	1	
6		RED GND	6	
2		GREEN COAX	2	
7		GREEN GND	7	
3		BLUE COAX	3	
8		BLUE GND	8	
4	—	GREEN	4	—
5	—	BLUE	5	—
9	—	YELLOW	9	—
10	—	VIOLET	10	—
11	—	BLACK	11	—
12	—	BROWN	12	—
13	—	RED	13	—
14	—	ORANGE	14	—
15	—	GRAY	15	—
SHELL	—		SHELL	—

xx = Cable Length

Feet	Millimeters
6	1830±50MM
10	3048±50MM
15	4575±70MM
25	7620±70MM
35	10670±100MM
50	15240±100MM

VPI VIDEO PRODUCTS INCORPORATED

1275 Danner Drive Aurora, Ohio 44202
 Tel: 1-800-626-7801 Fax: 330-562-1999
 www.vpi.us sales@vpi.us