

NOTE: HDD15M

1.CABLE: UL2919 1354(S)28#*3C+28#*4PR+AEB 85%

OD:8.9MM COLOR:P207 (W95051611)

MARKING: 9AWM E101344-D STYLE 2919 VW-1 80c 30V LOW

VOLTAGE COMPUTER CABLE Video Products Inc WWW.VPI.US

2.CONNECTOR: HDD15P MALE NO 9 GOLD PLATED PIN
NICKEL SHELL, BLACK INSULATOR

3.METAL: HDD15P SHORT TYPE, TIN PLATED

4.THUMBSCREW: Q TYPE 4.5*48.1 #4-40 UNC K782

5.PVC: COLOR:V294, 45P, MOLDING TOOL:M¹/₂-D15-414

6.COVER: DUST COVER HDD15P BLACK.

ELECTRONIC TEST:

A.OPEN/SHORT/INTERMITTENCE: 100%.

B.HI-POT: 300V AC/sec

C.INSULATION RESISTANCE: 20MΩ (MIN)

D.CONDUCTIVE RESISTANCE: 2Ω (MAX)


E.CPK Measure point Y1-Y3.

CB4071	1830±50MM
CB4085	4575±70MM
CB4129	15240±100MM
CB4165	915±30MM
CB4159	22860±100MM
CB4156	30500±100MM
CB4120	10670±100MM
CB4084	3048±50MM
CB4096	7620±75MM

All Material Comply With RoHS.

HDD15M



PIN OUT

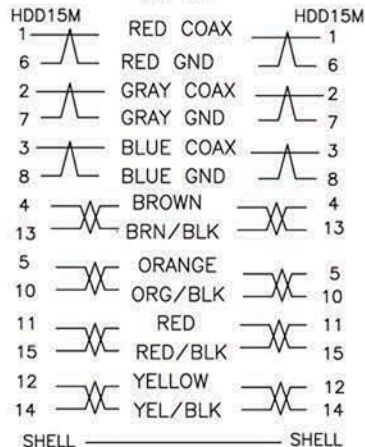
**VIDEO
PRODUCTS
INCORPORATED**

1275 Danner Drive Aurora, Ohio 44202

Tel: 1-800-626-7801 Fax: 330-562-1999

www.vpi.us sales@vpi.us

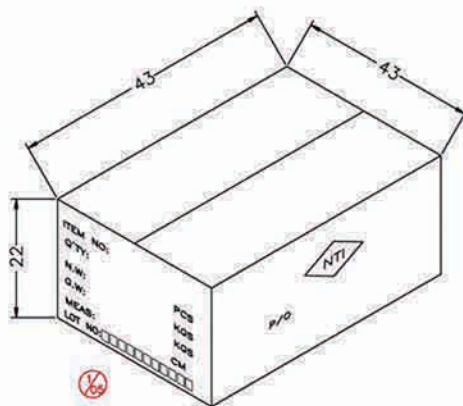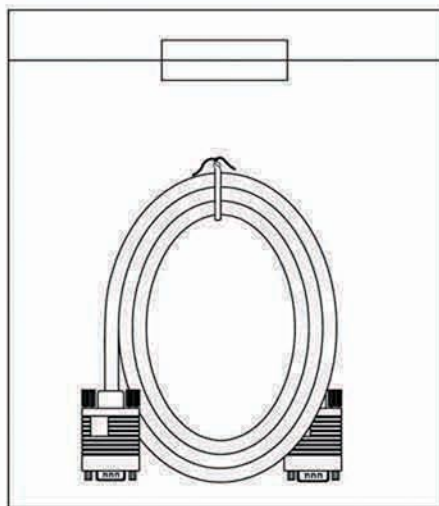

1	CB4071	6FT	50PCS	7"*11"*0.06MM	120MM*1
2	CB4085	15FT	30PCS	10"*12"*0.06MM	150MM*1
3	CB4129	50FT	12PCS	14"*14"*0.06MM	300MM*2
4	CB4165	3FT	100PCS	7"*9"*0.06MM	120MM*1
5	CB4120	35FT	16PCS	14"*14"*0.06MM	250MM*2
6	CB4159	75FT	8PCS	15"*15"*0.06MM	400MM*2
7	CB4156	100FT	6PCS	15"*15"*0.06MM	450MM*2
8	CB4084	10FT	40PCS	9"*11"*0.06MM	150MM*1
9	CB4096	25FT	20PCS	12"*12"*0.06MM	250MM*2



WATERPROOF BAG: 36"*30"*0.06MM
 CARTON: 43*43*22cm

VPI VIDEO
 PRODUCTS
 INCORPORATED

1275 Danner Drive Aurora, Ohio 44202
 Tel: 1-800-626-7801 Fax: 330-562-1999
www.vpi.us sales@vpi.us